



Rugged & Reliable  
Industrial Networking Solutions



Red Lion's N-Tron series products are manufactured in the USA in Mobile, Alabama and available from our global network of distributors and integrators.

To learn more about Red Lion and N-Tron products, visit our websites at [www.redlion.net](http://www.redlion.net) and [www.n-tron.com](http://www.n-tron.com).

Non-warranty related returns must be made within 30 days from the original date of shipment and are subject to a re-stocking fee. Singlemode fiber products and custom length cables are non-returnable, non-refundable. All returns require prior authorization. Shipping costs are not included.

# High Performance Hardened Switches

Red Lion offers high-quality N-Tron series hardened Industrial Ethernet products designed specifically for industrial, marine and utility applications that require high reliability, superior performance and exceptional noise immunity.









N-Tron switches use store-and-forward architecture and are designed to operate in applications needing extended temperatures ranging from -40°C to 85°C, high shock and vibration specifications, elevated RFI/EMI environments and are UL Listed for use in Class I, Division 2 Hazardous areas. Our products feature wide ranging redundant power supply inputs and can be DIN-Rail, panel, or rack mounted. The N-Tron product series offers IEEE 802.3 10/100BaseTX twisted pair copper and 100BaseFX fiber optic ports, as well as Gigabit capability on our 1000, 7000 and 9000 series. Our multimode fiber models are capable of driving up to 2km of multimode fiber optic cable. Singlemode fiber models are able to extend distances ranging from 15km to 80km of singlemode fiber optic cable.

N-Tron's N-View™ OPC Server Software is available for use with the N-Tron 300 and 500 Series Switches with the N-View firmware option, and is provided as a standard feature on all 700, 7000 and 9000 Switches. N-View OPC Software provides switch and port status information of N-View capable switches, for use in popular OPC client HMI Software Packages. N-View is currently available for Windows NT 4.0 w/SP4 or later, Windows 2003 Server, Windows 2000, XP, Vista, and Windows 7 operating systems.

## N-Tron Series Industrial Features and Specifications\*

- Rugged metal enclosures for high noise environments
- DIN-Rail mount, panel mount and rackmount available
- Store-and-Forward wire speed technology
- Redundant power inputs
- Low current requirements
- All TX ports support unshielded twisted pair (UTP) or shielded twisted pair (STP) cabling
- Wide range of fiber optic transceivers 2km, 15km, 40km, or 80km
- ESD overvoltage protection diodes on all I/O ports
- 1 to 2 million hours mean time between failure (MTBF)
- Shock: 200g for 10ms
- Seismic triaxial: 50g, 5-200Hz, 15 seconds
- Extended operating temperatures
- IP67-rated models available
- FCC Part 15 Class A
- CE: EN61000-6-2,4, EN55011, EN61000-4-2,3,4,5,6
- UL 1604 C Listed (US, Canada) Class I, Div. 2 Hazardous Location
- ATEX Zone 2, Category 3G, Ex nC Mark
- IEEE 1613 compliance (Electric Utility Substation)
- NEMA TS1/TS2 compliance (Traffic Control)
- American Bureau of Shipping (ABS) Type approval
- EN50155 for railway applications
- RoHS compliance
- GOST-R certified

\*Refer to product details for applicable specifications

Unmanaged and PoE		
<b>100 Series</b>		4-9
<b>1000 Series Gigabit</b>		9
Monitored		
<b>300 Series -N Option</b>		10-13
Process Control		
<b>500 Series -A Option</b>		14-17
Fully Managed		
<b>700 Series including Wireless</b>		22-27
<b>7000 Series Gigabit Capable</b>		28-37
<b>9000 Series Gigabit Capable</b>		38-39
Options and Accessories		
<b>Advanced Features</b>		18
<b>N-View Software</b>		20-21
<b>N-Ring Fault Mapping</b>		34
<b>EtherNet/IP™ with CIP Messaging</b>		35
<b>Serial Devices</b>		40-41
<b>Network Topologies</b>		43-47
<b>Peripherals</b>		48-49
New Product Series		
<b>EL Series Gigabit Capable</b>		50-51

# Affordable Entry-Level Industrial Fast Ethernet Products

The N-Tron 100 Series, provides economical, entry-level fast Ethernet switches and peripheral products designed to expand your Industrial Ethernet network. This flexible line is ideal for data acquisition, control and Ethernet I/O applications requiring unmanaged, affordable products. Our 104TX, 105TX and 108TX copper switches offer compact, unmanaged Ethernet switches ideal for increasing network bandwidth and determinism. Multimode and Singlemode Fiber models are also available with N-Tron's 102MC Media Converter, 105FX, five port switch and 106FX2, six port switch. Standard voltage 100 Series models are UL Listed for use in Class I, Division 2 hazardous locations. High voltage models are TÜV/GS certified. Select models are also ABS approved for maritime environments and EN50155 certified for railway applications.



ABB Industrial IT™ Certified

## 104TX

- Four RJ-45 10/100BaseTX Copper Ports
- Compact Size
- Unmanaged Operation
- Full Wire Speed Communications
- Supports Full/Half Duplex Operation
- Case Dimensions (2.9" h x 1.5" w x 3.6" d, 0.6 lbs.)
- -40°C to 80°C Operating Temperature
- Hardened Metal DIN-Rail Enclosure
- Redundant Power Inputs 10-30 VDC, 215 mA @ 24V
- Hardened ESD Protection Diodes on all Ports
- Surge Protection Diodes on Power Inputs
- Order Part #104TX

## 105TX

- Five RJ-45 10/100BaseTX Copper Ports
- Compact Size
- Unmanaged Operation
- Full Wire Speed Communications
- Supports Full/Half Duplex Operation
- Case Dimensions (2.9" h x 1.5" w x 3.6" d, 0.6 lbs.)
- -40°C to 80°C Operating Temperature
- Hardened Metal DIN-Rail Enclosure
- Redundant Power Inputs 10-30 VDC, 215 mA @ 24V
- Hardened ESD Protection Diodes on all Ports
- Surge Protection Diodes on Power Inputs
- Order Part #105TX

## 108TX

- Eight RJ-45 10/100BaseTX Copper Ports
- Compact Size
- Unmanaged Operation
- Full Wire Speed Communications
- Supports Full/Half Duplex Operation
- Case Dimensions (3.5" h x 1.5" w x 3.6" d, 0.7 lbs.)
- -40°C to 70°C Operating Temperature
- Hardened Metal DIN-Rail Enclosure
- Redundant Power Inputs 10-30 or 10-60 VDC, 250 mA @ 24V
- Hardened ESD Protection Diodes on all Ports
- Surge Protection Diodes on Power Inputs
- Order Part #108TX
- Order Part #108TX-HV



N-Tron 100 Series made in the USA.



## 102MC

- One RJ-45 10/100BaseTX Copper Port
- One 100BaseFX Full Duplex Fiber Port
- Unmanaged Media Converter
- Full Wire Speed Communications
- RJ-45 Port Supports Full/Half Duplex Operation
- Case Dimensions (2.9" h x 1.5" w x 3.6" d, 0.5 lbs.)
- -40°C to 80°C Operating Temperature
- Hardened Metal DIN-Rail Enclosure
- Redundant Power Inputs 10-30 VDC, 140 mA @ 24V
- Hardened ESD Protection Diodes on RJ-45 Port
- Surge Protection Diodes on Power Inputs
- Order MM Part #102MC-XX  
Order SM Part #102MCE-XX-YY

## 105FX

- Four RJ-45 10/100BaseTX Copper Ports
- One 100BaseFX Full Duplex Fiber Port
- Unmanaged Operation
- Full Wire Speed Communications
- RJ-45 Port Supports Full/Half Duplex Operation
- Case Dimensions (3.5" h x 1.5" w x 3.6" d, 0.6 lbs.)
- -40°C to 70°C Operating Temperature
- Hardened Metal DIN-Rail Enclosure
- Redundant Power Inputs 10-30 VDC, 270 mA @ 24V
- Hardened ESD Protection Diodes on RJ-45 Port
- Surge Protection Diodes on Power Inputs
- Order MM Part #105FX-XX  
Order SM Part #105FXE-XX-YY

## 106FX2

- Four RJ-45 10/100BaseTX Copper Ports
- Two 100BaseFX Full Duplex Fiber Ports
- Unmanaged Operation
- Full Wire Speed Communications
- RJ-45 Ports Support Full/Half Duplex Operation
- Case Dimensions (3.5" h x 1.5" w x 3.6" d, 0.6 lbs.)
- -40°C to 70°C Operating Temperature
- Hardened Metal DIN-Rail Enclosure
- Redundant Power Inputs 10-30 VDC, 270 mA @ 24V
- Hardened ESD Protection Diodes on RJ-45 Ports
- Surge Protection Diodes on Power Inputs
- Order MM Part #106FX2-XX  
Order SM Part #106FXE2-XX-YY

Ordering Key: MM = multimode fiber, SM = singlemode fiber, "XX" = ST or SC for fiber style connector, "E" = singlemode fiber, "YY" = 15, 40, or 80 for 15km, 40km, or 80km SM fiber length. "HV" = High Voltage Model

# Unmanaged Ethernet with Diverse Port Count Options

N-Tron's plug-and-play 100 series provides compact network switches designed for high-performance operation under harsh conditions. Each unmanaged model provides full-wire speed communication, auto sensing and auto negotiation capabilities and an expanded feature set to tackle the demands of industrial data acquisition, control and Ethernet I/O applications. The series offers an array of port configurations, from all-copper products to combination units with up to eight copper and six fiber ports. Fiber optic units support communication over extended distances—up to 80km. The switches' ultra compact size and versatile mounting options allow these affordable devices to be used anywhere on the network and are UL Listed for use in Class I, Division 2 hazardous locations.



## 105TX-SL

- Five RJ-45 10/100BaseTX Copper Ports
- Slim, Space-saving Design
- Unmanaged Operation
- Full Wire Speed Communications
- RJ-45 Ports Supports Full/Half Duplex Operation
- Case Dimensions (4.0" h x 1.0" w x 3.6" d, 0.7 lbs.)
- -40°C to 85°C Operating Temperature
- Hardened Metal DIN-Rail Enclosure
- Redundant Power Inputs 10-30 VDC, 215 mA @ 24V
- Hardened ESD Protection Diodes on all RJ-45 Ports
- Surge Protection Diodes on Power Inputs
- Order #105TX-SL

## 116TX

- Sixteen RJ-45 10/100BaseTX Copper Ports
- Slim, Space-saving Design
- Unmanaged Operation
- Full Wire Speed Communications
- RJ-45 Ports Supports Full/Half Duplex Operation
- Case Dimensions (5.8" h x 2.0" w x 4.1" d, 1.1 lbs.)
- -40°C to 85°C Operating Temperature
- Hardened Metal DIN-Rail Enclosure
- Redundant Power Inputs 10-49 VDC, 300 mA @ 24V
- Hardened ESD Protection Diodes on all RJ-45 Ports
- Surge Protection Diodes on Power Inputs
- Order #116TX

## 110FX2

- Eight RJ-45 10/100BaseTX Copper Ports
- Two 100BaseFX Full Duplex Fiber Ports
- Unmanaged Operation
- Full Wire Speed Communications
- RJ-45 Ports Supports Full/Half Duplex Operation
- Case Dimensions (4.3" h x 2.4" w x 4.6" d, 1.4 lbs.)
- -40°C to 80°C Operating Temperature
- Hardened Metal DIN-Rail Enclosure
- Redundant Power Inputs 10-49 VDC, 355 mA @ 24V
- Hardened ESD Protection Diodes on all RJ-45 Ports
- Surge Protection Diodes on Power Inputs
- Order MM Part #110FX2-XX  
Order SM Part #110FXE2-XX-YY



N-Tron 100 Series made in the USA.



## 111FX3

- Eight RJ-45 10/100BaseTX Copper Ports
- Three 100BaseFX Full Duplex Fiber Ports
- Unmanaged Operation
- Full Wire Speed Communications
- RJ-45 Ports Supports Full/Half Duplex Operation
- Case Dimensions (4.3" h x 2.4" w x 4.6" d, 1.4 lbs.)
- -40°C to 80°C Operating Temperature
- Hardened Metal DIN-Rail Enclosure
- Redundant Power Inputs 10-49 VDC, 410 mA @ 24V
- Hardened ESD Protection Diodes on all RJ-45 Ports
- Surge Protection Diodes on Power Inputs
- Order MM Part #111FX3-XX  
Order SM Part #111FXE3-XX-YY

## 112FX4

- Eight RJ-45 10/100BaseTX Copper Ports
- Four 100BaseFX Full Duplex Fiber Ports
- Unmanaged Operation
- Full Wire Speed Communications
- RJ-45 Ports Supports Full/Half Duplex Operation
- Case Dimensions (4.3" h x 3.1" w x 4.6" d, 1.6 lbs.)
- -40°C to 80°C Operating Temperature
- Hardened Metal DIN-Rail Enclosure
- Redundant Power Inputs 10-49 VDC, 455 mA @ 24V
- Hardened ESD Protection Diodes on all RJ-45 Ports
- Surge Protection Diodes on Power Inputs
- Order MM Part #112FX4-XX  
Order SM Part #112FXE4-XX-YY

## 114FX6

- Eight RJ-45 10/100BaseTX Copper Ports
- Six 100BaseFX Full Duplex Fiber Ports
- Unmanaged Operation
- Full Wire Speed Communications
- RJ-45 Ports Supports Full/Half Duplex Operation
- Case Dimensions (4.3" h x 3.1" w x 4.6" d, 1.7 lbs.)
- -40°C to 80°C Operating Temperature
- Hardened Metal DIN-Rail Enclosure
- Redundant Power Inputs 10-49 VDC, 545 mA @ 24V
- Hardened ESD Protection Diodes on all RJ-45 Ports
- Surge Protection Diodes on Power Inputs
- Order MM Part #114FX6-XX  
Order SM Part #114FXE6-XX-YY

Ordering Key: MM = multimode fiber, SM = singlemode fiber, "XX" = SI or SC for fiber style connector, "E" = singlemode fiber, "YY" = 15, 40, or 80 for 15km, 40km, or 80km SM fiber length.

# Rugged Unmanaged Fast Ethernet Switches IP67 Rated for Harsh Environments

Ideal for mission critical data acquisition, control and Ethernet I/O applications with severe environmental conditions, N-Tron's 105M12 and 108M12 unmanaged fast Ethernet Switches are IP67 rated for protection against dust, low and high pressure water jets and temporary immersion in water. These units utilize standard M12 D-Coded connectors for either five or eight 10/100BaseTX copper ports and carry extended operating temperatures, high MTBF and other specifications for unbeatable reliability. Standard voltage models are UL Listed for use in Class I, Division 2 hazardous locations; ABS and DNV approved for maritime environments. High voltage models are TÜV/GS certified. All models are EN50155 certified for railway applications.



## 105M12

- Five 10/100BaseTX Copper Ports with M12 D-Coded Female 4 Pin Connectors
- Unmanaged Operation
- IP67 Rated Hardened Metal Enclosure Bulkhead Mountable (DIN-Rail Mounting Option Available)
- Protected Against Low/High Pressure Water Jets and Temporary Immersion in Water
- Totally Protected Against Dust Ingress
- Case Dimensions (5.0" h x 4.4" w x 1.8" d, 1.8 lbs.)
- -40°C to 80°C Operating Temperature
- Supports up to 2,000 MAC Addresses
- Full/Half Duplex Operation Auto Sensing Speed and Flow Control
- ESD Protection Diodes on all Ports Surge Protection Diodes on Power Inputs
- Redundant Power Inputs 10-30 VDC, 215mA @ 24V
- Order Part #105M12

## 108M12

- Eight 10/100BaseTX Copper Ports with M12 D-Coded Female 4 Pin Connectors
- Unmanaged Operation
- IP67 Rated Hardened Metal Enclosure Bulkhead Mountable (DIN-Rail Mounting Option Available)
- Protected Against Low/High Pressure Water Jets and Temporary Immersion in Water
- Totally Protected Against Dust Ingress
- Case Dimensions (6.7" h x 6.7" w x 1.8" d, 3.3 lbs.)
- -40°C to 70°C Operating Temperature
- Supports up to 2,000 MAC Addresses
- Full/Half Duplex Operation Auto Sensing Speed and Flow Control
- ESD Protection Diodes on all Ports Surge Protection Diodes on Power Inputs
- Redundant Power Inputs 10-30 or 10-60 VDC, 250mA @ 24V
- Order Part #108M12
- Order Part #108M12-HV for High Voltage Model



N-Tron 100, PoE and 1000 Series made in the USA.



# Power over Ethernet and Gigabit Products with -40°C to 85°C Operating Temperature

**N-Tron's Industrial Power over Ethernet (PoE)** products are designed to transmit power, along with data, over an Ethernet network and are ideal for PoE capable devices where running an AC power feed is either not possible or cost effective. They are UL listed for use in Class I, Division 2 Hazardous locations, ABS approved for maritime environments and EN50155 certified for railway applications.

**N-Tron's 1000 Series** is ideal for industrial data acquisition, control and Ethernet I/O applications where a small footprint and gigabit speed is preferred. Ordering tip—the 1003GX2 comes pre-configured with multimode or singlemode fiber SFP transceivers; 1003GX2-SX with matching multimode full duplex fiber SFPs; the 1003GX2-LX-ZZ with two matching singlemode full duplex fiber SFPs (see full ordering key below). The 1003GX2 may also be ordered a la carte allowing you to mix-and-match various lengths of multimode and singlemode full duplex fiber. The 1000 Series is UL listed for use in Class I, Division 2 Hazardous locations and ABS-approved for maritime environments.



## Industrial PoE

- Designed to Transmit Power along with Data over an Ethernet Network
- Ideal for PoE Cameras, Wireless Access Points, or other PoE Devices
- PoE Splitter Allows Devices which are not PoE Capable to be Connected and Powered by Cat5 Cable
- Auto-Detection of Connected PoE Capable Devices
- Full IEEE 802.3af Compliance
- PoE Case Dimensions (3.5" h x 1.5" w x 3.6" d, 0.7 lbs.)
- 100-POE-SPL Case Dimensions (4.0" h x 1.0" w x 3.7" d, 0.6 lbs.)
- -40°C to 85°C Operating Temperature
- Supports 15.4 Watts per Port (13 Watts at the PD) Redundant Power Inputs 46-49 VDC (46-54 on 100-POE-SPL)
- Two Port Ethernet *i*PoE Splitter Order Part #100-POE-SPL-CC
- Four Port PoE MidSpan Power Injector Order Part #100-POE4
- Four PoE Switch Ports + 10/100BaseTX Uplink Order Part #105TX-POE
- Four PoE Switch Ports + 100BaseFX Full Duplex Fiber Uplink Order MM Part #105FX-XX-POE, SM Part #105FXE-XX-YY-POE

## 1000 Series Gigabit

- Compact Industrial Ethernet Gigabit Switches, Ideal for Smaller Spaces
- Plug-and-play Unmanaged Operation
- RJ-45 Ports Support Full/Half Duplex Operation
- Auto Sensing Speed and Flow Control (RJ-45)
- Full IEEE 802.3, 802.3u, 802.3z and 802.3ab Compliance
- Case Dimensions (4.0" h x 1.0" w x 3.7" d, 0.6 lbs.)
- -40°C to 85°C Operating Temperature
- Fully Redundant Power Inputs (10-30 VDC)
- ESD Protection Diodes on RJ-45 Ports and Surge Protection Diodes on Power Inputs
- Five 10/100/1000BaseT Ports Order Part #1005TX
- One 10/100/1000BaseT Port & One 1000BaseSX/LX SFP Port Order MM Part #1002MC-SX, SM Part #1002MC-LX-ZZ
- Mix-and-Match Multimode & Singlemode SFP Transceivers Order Part #1003GX2-B + NTSFP-SX or NTSFP-LX-ZZ

Ordering Key: MM = multimode fiber, SM = singlemode fiber, "CC" = 12, 24, or 48VDC output, "XX" = ST or SC for fiber style connector, "E" = singlemode fiber, "YY" = 15, 40, or 80 for 15km, 40km, or 80km SM fiber length of PoE Devices, "ZZ" = 10, 40, or 80 for SM fiber length of gigabit products.

# Unmanaged Fast Ethernet Switches with Remote Monitoring (-N)

The N-Tron 300 Series of hardened industrial Ethernet switches offer high reliability and full wire speed communications, in a compact size, ideal for use in mission critical, industrial, data acquisition, control and Ethernet I/O applications. These DIN-Rail mounted switches are designed to exceed the most demanding industrial communications needs and environmental conditions, while providing high throughput and minimum downtime. The 300 Series switches configured with the N-View option, can be monitored using standard OPC compliant HMI software in order to provide complete network monitoring and performance alarms. Handling up to 4,000 MAC addresses, these products support extremely sophisticated and complex network architectures. The 300 Series provides an affordable solution, while maintaining the simplicity of a plug-and-play auto sensing switch. Select 300 Series switches are supplied with the following regulatory approvals: FCC Part 15 Class A, UL 1604 C Listed (U.S. & Canada) for Class I, Div. 2 Hazardous Locations, IEEE 1613 Compliance (Electric Utility Substation), ABS Type Approval (Maritime) and NEMA TS1/TS2 Compliance (Traffic Control).



## 304TX-N

- Four RJ-45 10/100BaseTX Ports
- Supports UTP or STP Cabling
- Compact Size, Small Footprint (3.1" h x 2.1" w x 3.4" d, 0.8 lbs.)
- -40°C to 70°C Operating Temperature
- Rugged Industrial DIN-Rail Enclosure
- Full Wire Speed Communications
- Redundant Power Inputs 10-30 VDC, 250 mA @ 24V
- Auto Negotiates Speed, Duplex and MDIX
- UL Listed Class I, Div. 2 for Hazardous Locations
- N-View OPC Monitoring Included with -N Model
- Hardened ESD Port Protection
- Order Part #304TX-N

## 306TX-N

- Six RJ-45 10/100BaseTX Ports
- Supports UTP or STP Cabling
- Compact Size, Small Footprint (3.1" h x 2.1" w x 3.4" d, 0.8 lbs.)
- -40°C to 70°C Operating Temperature
- Rugged Industrial DIN-Rail Enclosure
- Full Wire Speed Communications
- Redundant Power Inputs 10-30 VDC, 250 mA @ 24V
- Auto Negotiates Speed, Duplex and MDIX
- UL Listed Class I, Div. 2 for Hazardous Locations
- N-View OPC Monitoring Included with -N Model
- Hardened ESD Port Protection
- Order Part #306TX-N

## 308TX-N

- Eight RJ-45 10/100BaseTX Ports
- Supports UTP or STP Cabling
- Compact Size, Small Footprint (3.5" h x 2.1" w x 3.4" d, 0.8 lbs.)
- -40°C to 70°C Operating Temperature
- Rugged Industrial DIN-Rail Enclosure
- Full Wire Speed Communications
- Redundant Power Inputs 10-30 VDC, 250 mA @ 24V
- Auto Negotiates Speed, Duplex and MDIX
- UL Listed Class I, Div. 2 for Hazardous Locations
- N-View OPC Monitoring Included with -N Model
- Hardened ESD Port Protection
- Order Part #308TX-N



N-Tron 300 Series made in the USA.



## 302MC-N

- One RJ-45 10/100BaseTX Port
- One 100BaseFX ST or SC Full Duplex Port
- Compact Size, Small Footprint (3.0" h x 2.1" w x 3.2" d, 0.8 lbs.)
- -40°C to 70°C Operating Temperature
- Rugged Industrial DIN-Rail Enclosure
- Full Wire Speed Communications
- Redundant Power Inputs 10-30 VDC, 250 mA @ 24V
- RJ-45 Port Auto Negotiates Speed, Duplex and MDIX
- UL Listed Class I, Div. 2 for Hazardous Locations
- N-View OPC Monitoring Included with -N Model
- Hardened ESD Port Protection
- Order MM Part #302MC-N-XX  
Order SM Part #302MCE-N-XX-YY


## 305FX-N

- Four RJ-45 10/100BaseTX Ports
- One 100BaseFX ST or SC Full Duplex Port
- Compact Size, Small Footprint (3.5" h x 2.1" w x 3.4" d, 0.9 lbs.)
- -40°C to 70°C Operating Temperature
- Rugged Industrial DIN-Rail Enclosure
- Full Wire Speed Communications
- Redundant Power Inputs 10-30 VDC, 250 mA @ 24V
- RJ-45 Ports Auto Negotiate Speed, Duplex and MDIX
- UL Listed Class I, Div. 2 for Hazardous Locations
- N-View OPC Monitoring Included with -N Model
- Hardened ESD Port Protection
- Order MM Part #305FX-N-XX  
Order SM Part #305FXE-N-XX-YY

## 306FX2-N

- Four RJ-45 10/100BaseTX Ports
- Two 100BaseFX ST or SC Full Duplex Ports
- Compact Size, Small Footprint (3.5" h x 2.1" w x 3.4" d, 0.9 lbs.)
- -40°C to 70°C Operating Temperature
- Rugged Industrial DIN-Rail Enclosure
- Full Wire Speed Communications
- Redundant Power Inputs 10-30 VDC, 250 mA @ 24V
- RJ-45 Ports Auto Negotiate Speed, Duplex and MDIX
- UL Listed Class I, Div. 2 for Hazardous Locations
- N-View OPC Monitoring Included with -N Model
- Hardened ESD Port Protection
- Order MM Part #306FX2-N-XX  
Order SM Part #306FXE2-N-XX-YY

Ordering Key: MM = multimode fiber, SM = singlemode fiber, "E" = singlemode fiber, "-N" = N-View OPC Switch Monitoring, leave blank for no monitoring option, "XX" = ST or SC for fiber style connector, "YY" = 15, 40, or 80 for 15km, 40km, or 80km SM fiber length.

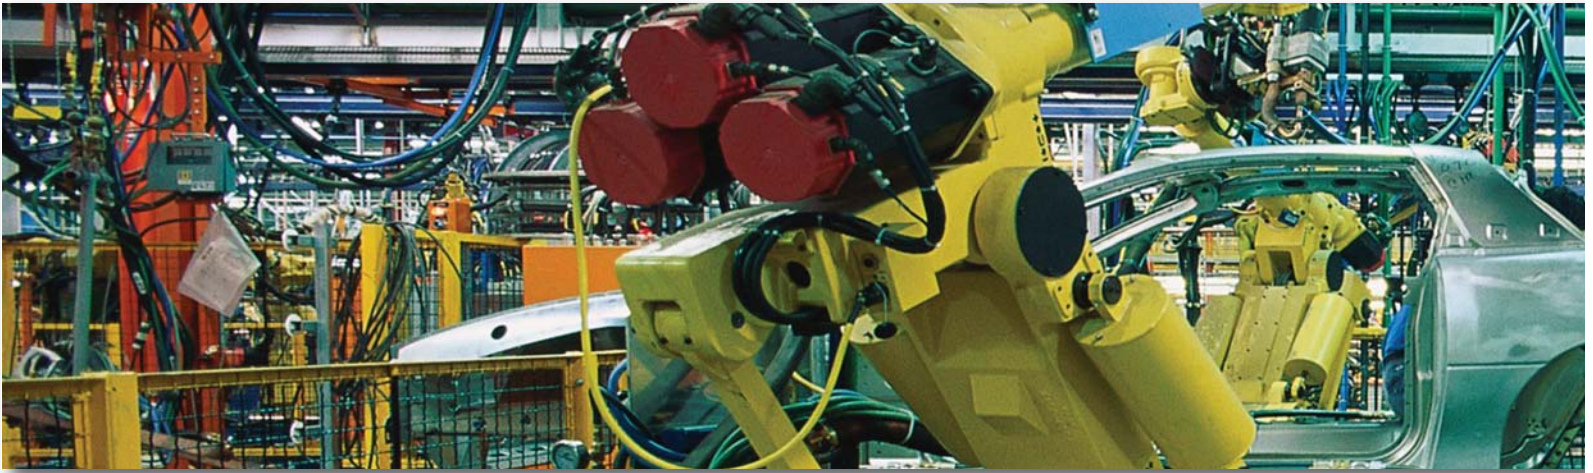

## 308FX2-N

- Six RJ-45 10/100BaseTX Ports
- Two 100BaseFX ST or SC Full Duplex Ports
- Case Dimensions (5.9" h x 2.3" w x 3.8" d, 1.7 lbs.)
- -40°C to 85°C Operating Temperature
- Rugged Industrial DIN-Rail Enclosure
- Full Wire Speed Communications
- Redundant Power Inputs 10-30 VDC, 380 mA @ 24V
- RJ-45 Ports Auto Negotiates Speed, Duplex and MDIX
- UL Listed Class I, Div. 2 for Hazardous Locations
- N-View OPC Monitoring Included with -N Model
- Hardened ESD Port Protection
- Order MM Part #308FX2-N-XX  
Order SM Part #308FXE2-N-XX-YY

## 309FX-N

- Eight RJ-45 10/100BaseTX Ports
- One 100BaseFX ST or SC Full Duplex Port
- Case Dimensions (5.5" h x 2.3" w x 3.5" d, 1.6 lbs.)
- -40°C to 85°C Operating Temperature
- Rugged Industrial DIN-Rail Enclosure
- Full Wire Speed Communications
- Redundant Power Inputs 10-30 VDC, 260 mA @ 24V
- RJ-45 Ports Auto Negotiates Speed, Duplex and MDIX
- UL Listed Class I, Div. 2 for Hazardous Locations
- N-View OPC Monitoring Included with -N Model
- Hardened ESD Port Protection
- Order MM Part #309FX-N-XX  
Order SM Part #309FXE-N-XX-YY



N-Tron 300 Series made in the USA.



## 316TX-N

- Sixteen RJ-45 10/100BaseTX Ports
- Supports UTP or STP Cabling
- Case Dimensions (7.4" h x 2.3" w x 3.5" d, 1.9 lbs.)
- -40°C to 85°C Operating Temperature
- Rugged Industrial DIN-Rail Enclosure
- Full Wire Speed Communications
- Redundant Power Inputs 10-30 VDC, 400 mA @ 24V
- RJ-45 Ports Auto Negotiates Speed, Duplex and MDIX
- UL Listed Class I, Div. 2 for Hazardous Locations
- N-View OPC Monitoring Included with -N Model
- Hardened ESD Port Protection
- Order Part #316TX-N

## 317FX-N

- Sixteen RJ-45 10/100BaseTX Ports
- One 100BaseFX ST or SC Full Duplex Port
- Case Dimensions (7.4" h x 2.3" w x 3.5" d, 1.9 lbs.)
- -40°C to 85°C Operating Temperature
- Rugged Industrial DIN-Rail Enclosure
- Full Wire Speed Communications
- Redundant Power Inputs 10-30 VDC, 440 mA @ 24V
- RJ-45 Ports Auto Negotiates Speed, Duplex and MDIX
- UL Listed Class I, Div. 2 for Hazardous Locations
- N-View OPC Monitoring Included with -N Model
- Hardened ESD Port Protection
- Order MM Part #317FX-N-XX  
Order SM Part #317FXE-N-XX-YY

Ordering Key: "-N" = N-View OPC Switch Monitoring, leave blank for no monitoring option. = multimode fiber, SM = singlemode fiber, "E" = singlemode fiber, "XX" = ST or SC for fiber style connector, "YY" = 15, 40, or 80 for 15km, 40km, or 80km SM fiber length.

# Fast Ethernet Process Control Switches with Remote Monitoring and Advanced Management



The N-Tron 500 Series, with the -A option, is well suited for connecting Ethernet equipped industrial control applications and comes with advanced Ethernet communication management features like VLAN, IGMP Snooping, Port Trunking, QoS and Mirroring. IGMP and query auto detect modes are enabled by default and key enhancements include multiple router support as well as dynamic router discovery and master/slave redundancy for query detection. The 500 Series products are designed to withstand extreme industrial environments and come standard with extended temperature ratings, extended shock, noise and vibration specifications, redundant power inputs and high MTBF. All 500 Series switches are supplied with the following regulatory approvals: FCC Part 15 Class A, UL 1604 C Listed (U.S. & Canada) for Class I, Div. 2 Hazardous Locations, ATEX Zone 2, Category 3G (Ex nC Mark), IEEE 1613 Compliance (Electric Utility Substation), ABS Type Approval (Maritime) and NEMA TS1/TS2 Compliance (Traffic Control).



## 508TX-A

- Eight RJ-45 10/100BaseTX Ports
- Supports UTP or STP Cabling
- Case Dimensions (2.3" h x 5.5" w x 3.5" d, 1.6 lbs.)
- -40°C to 85°C Operating Temperature
- Rugged Industrial DIN-Rail Enclosure
- Full Wire Speed Communications
- Redundant Power Inputs 10-30 VDC, 200 mA @ 24V
- Auto Negotiates Speed, Duplex and MDIX
- Advanced Management Features Included with -A Model
- N-View OPC Monitoring Included with -A and -N Models
- Hardened ESD Port Protection
- Order Part #508TX-A

## 516TX-A

- Sixteen RJ-45 10/100BaseTX Ports
- Supports UTP or STP Cabling
- Case Dimensions (2.3" h x 7.4" w x 3.5" d, 1.9 lbs.)
- -40°C to 85°C Operating Temperature
- Rugged Industrial DIN-Rail Enclosure
- Full Wire Speed Communications
- Redundant Power Inputs 10-30 VDC, 400 mA @ 24V
- Auto Negotiates Speed, Duplex and MDIX
- Advanced Management Features Included with -A Model
- N-View OPC Monitoring Included with -A and -N Models
- Hardened ESD Port Protection
- Order Part # 516TX-A



N-Tron 500 Series made in the USA.



## 508FX2-A

- Six RJ-45 10/100BaseTX Ports
- Two 100BaseFX ST or SC Full Duplex Ports
- Case Dimensions (2.3" h x 5.9" w x 3.8" d, 1.7 lbs.)
- -40°C to 85°C Operating Temperature
- Rugged Industrial DIN-Rail Enclosure
- Full Wire Speed Communications
- Redundant Power Inputs 10-30 VDC, 380 mA @ 24V
- RJ-45 Ports Auto Negotiate Speed, Duplex and MDIX
- Advanced Management Features Included with -A Model
- N-View OPC Monitoring Included with -A and -N Models
- Hardened ESD Port Protection
- Order MM Part #508FX2-A-XX-S  
Order SM Part #508FXE2-A-XX-YY


## 509FX-A

- Eight RJ-45 10/100BaseTX Ports
- One 100BaseFX ST or SC Full Duplex Port
- Case Dimensions (2.3" h x 5.5" w x 3.5" d, 1.6 lbs.)
- -40°C to 85°C Operating Temperature
- Rugged Industrial DIN-Rail Enclosure
- Full Wire Speed Communications
- Redundant Power Inputs 10-30 VDC, 260 mA @ 24V
- RJ-45 Ports Auto Negotiate Speed, Duplex and MDIX
- Advanced Management Features Included with -A Model
- N-View OPC Monitoring Included with -A and -N Models
- Hardened ESD Port Protection
- Order MM Part #509FX-A-XX-S  
Order SM Part #509FXE-A-XX-YY

## 517FX-A

- Sixteen RJ-45 10/100BaseTX Ports
- One 100BaseFX ST or SC Full Duplex Port
- Case Dimensions (2.3" h x 7.4" w x 3.5" d, 1.9 lbs.)
- -40°C to 85°C Operating Temperature
- Rugged Industrial DIN-Rail Enclosure
- Full Wire Speed Communications
- Redundant Power Inputs 10-30 VDC, 440 mA @ 24V
- RJ-45 Ports Auto Negotiate Speed, Duplex and MDIX
- Advanced Management Features Included with -A Model
- N-View OPC Monitoring Included with -A and -N Models
- Hardened ESD Port Protection
- Order MM Part #517FX-A-XX-S  
Order SM Part #517FXE-A-XX-YY

Ordering Key: MM = multimode fiber, SM = singlemode fiber, "E" = singlemode fiber, "XX" = ST or SC for fiber style connector, "-S" = -S for -20°C to 70°C operating temperature, leave blank for -40°C to 85°C operating temperature, "YY" = 15, 40, or 80 for 15km, 40km, or 80km SM fiber length. "-A" = -A for Advanced management features (includes N-View), or -N for N-View OPC Switch monitoring, leave blank for Unmanaged Switch option.

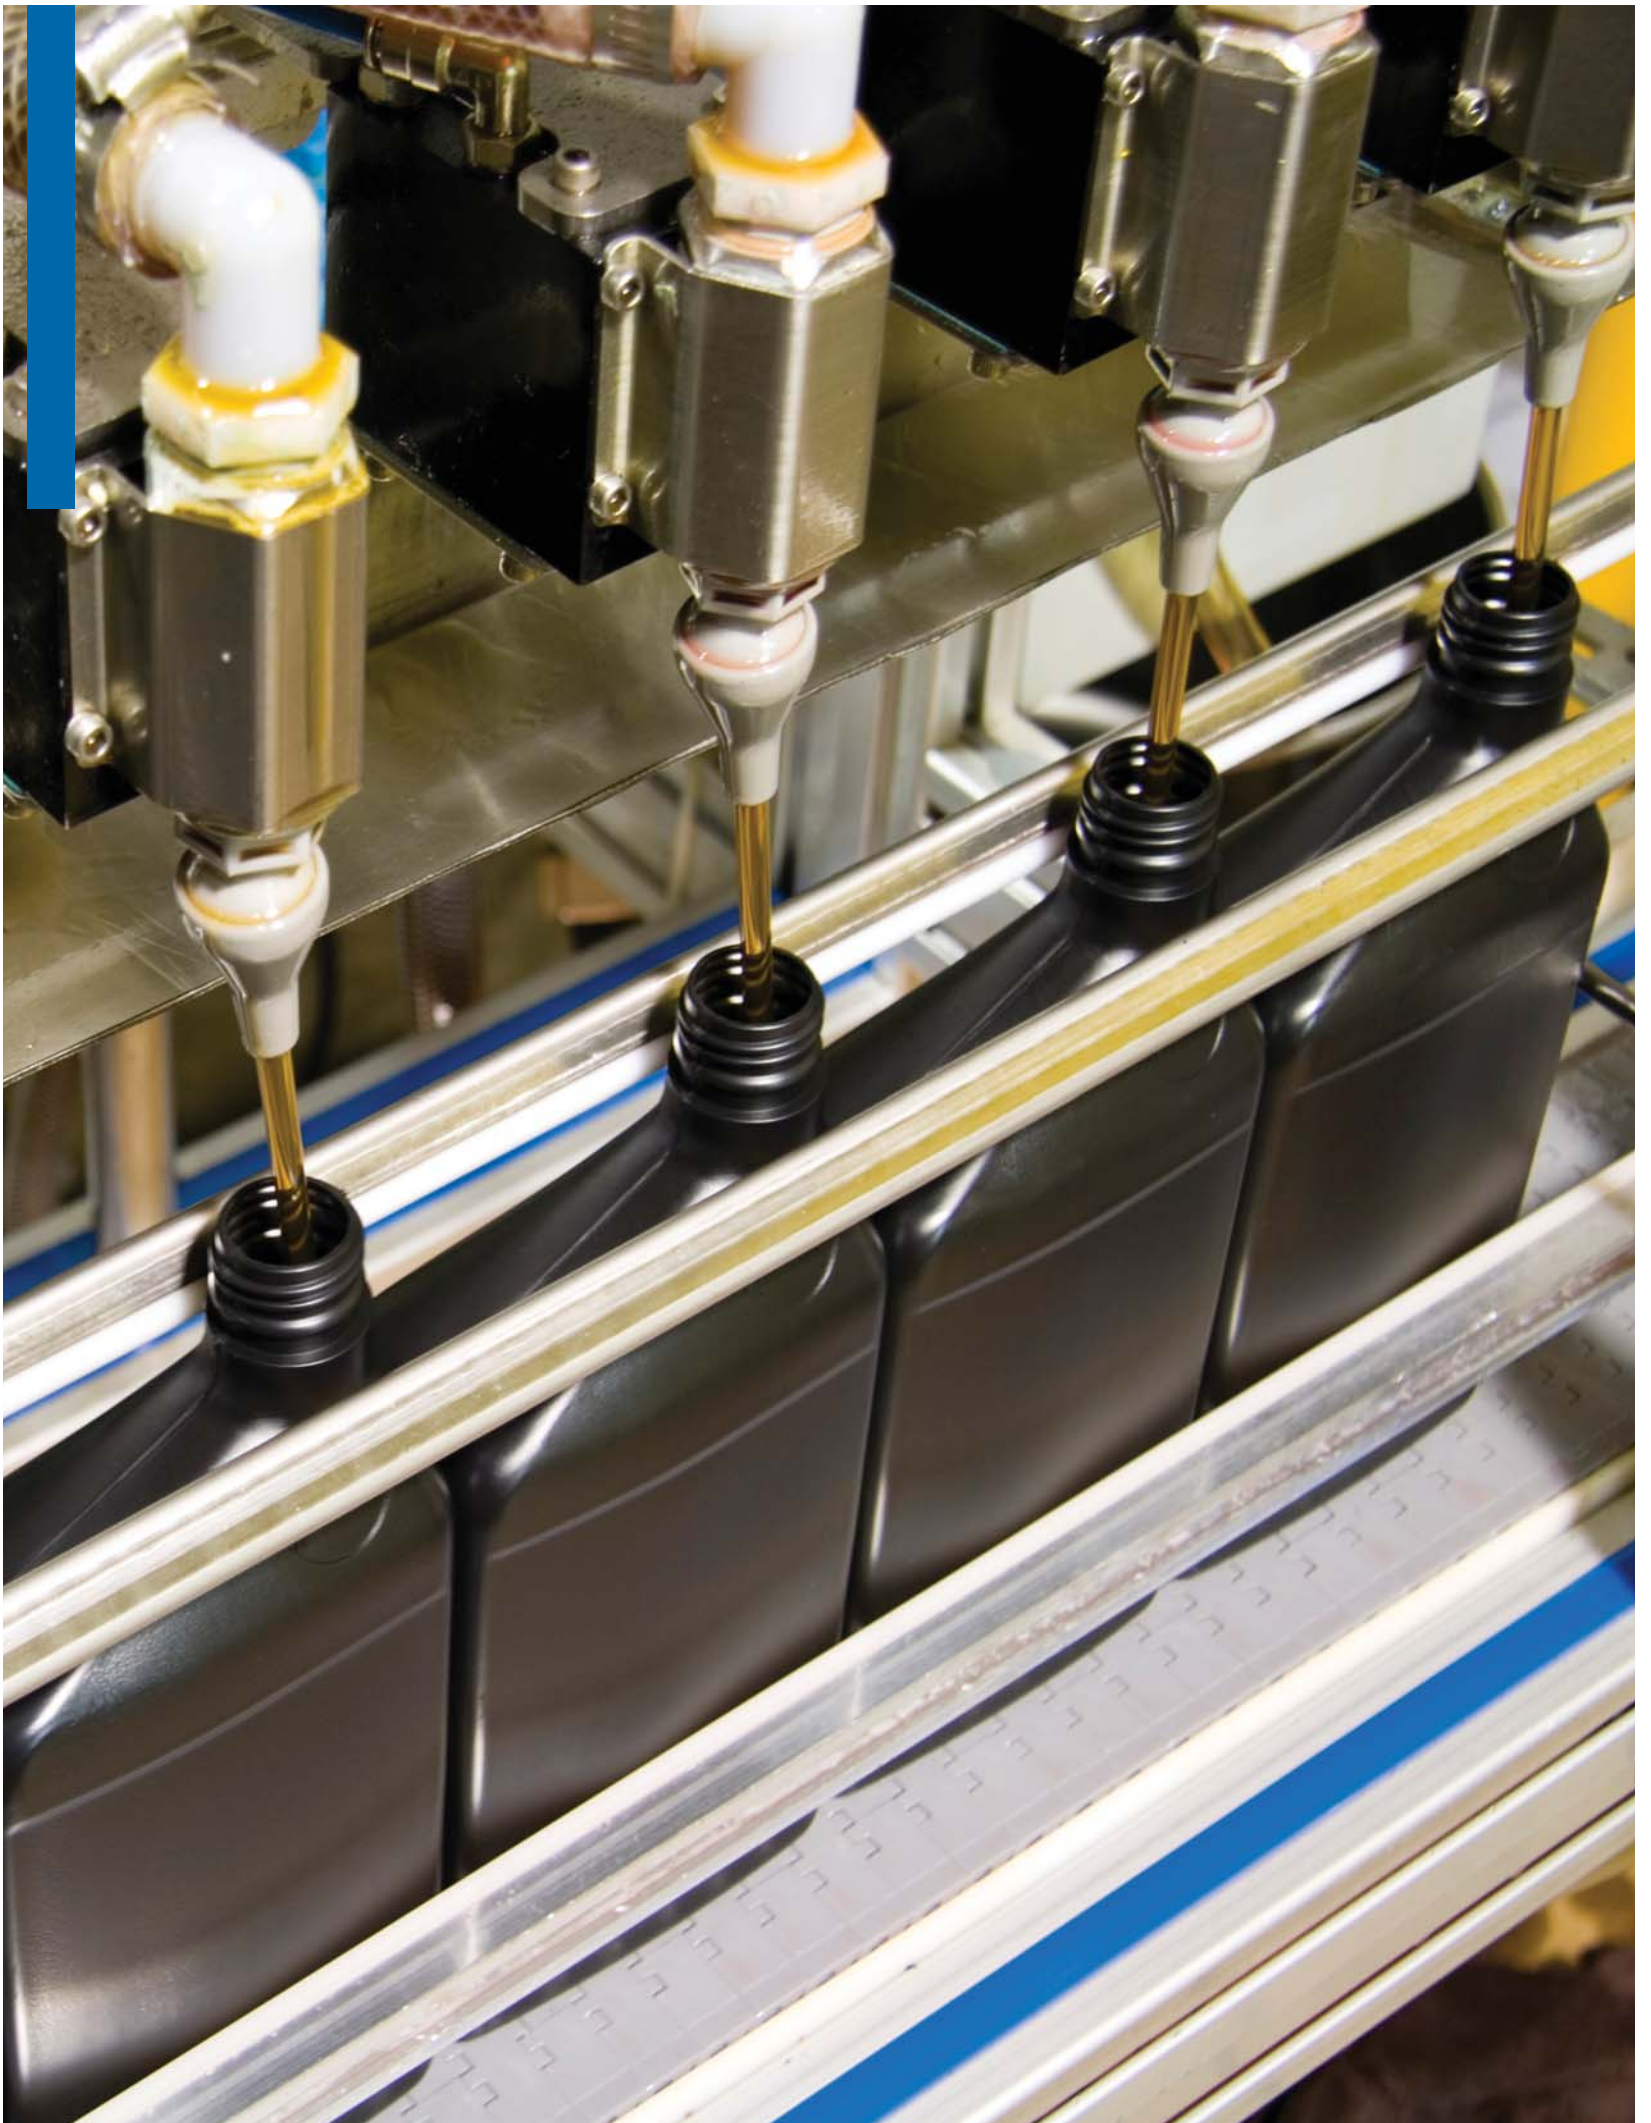



# Built to Withstand Extreme Industrial Environments



## 524TX-A

- Twenty-four RJ-45 10/100BaseTX Ports
- Supports UTP or STP Cabling
- Case Dimensions (1.8" h x 19" w x 4.3" d, 3.7 lbs.)
- -40°C to 85°C Operating Temperature
- Rugged Industrial Rackmount Enclosure
- Up to 2.6 Gb/s Throughput
- Redundant Power Inputs 10-30 VDC, 720 mA @ 24V
- Auto Negotiates Speed, Duplex and MDIX
- Advanced Management Features Included with -A Model
- N-View OPC Monitoring Included with -A and -N Models
- Hardened ESD Port Protection
- Order Part #524TX-A

## 526FX2-A

- Twenty-four RJ-45 10/100BaseTX Ports
- Two 100BaseFX ST or SC Full Duplex Ports
- Case Dimensions (1.8" h x 19" w x 4.3" d, 3.7 lbs.)
- -40°C to 85°C Operating Temperature
- Rugged Industrial Rackmount Enclosure
- Up to 2.6 Gb/s Throughput
- Redundant Power Inputs 10-30 VDC, 1 A @ 24V
- RJ-45 Ports Auto Negotiate Speed, Duplex and MDIX
- Advanced Management Features Included with -A Model
- N-View OPC Monitoring Included with -A and -N Models
- Hardened ESD Port Protection
- Order MM Part #526FX2-A-XX-S  
Order SM Part #526FXE2-A-XX-YY

N-Tron Industrial Ethernet products come standard with extended temperature ratings, high tolerance to shock, noise and vibration as well as redundant power inputs and a high MTBF.

Call +1 (251) 342-2164  
or visit [www.n-tron.com](http://www.n-tron.com)  
for more details.



N-Tron 500 Series made in the USA.

Ordering Key: "-A" = -A for advanced management features (includes N-View), or -N for N-View OPC Switch monitoring, leave blank for Unmanaged Switch option. MM = multimode fiber, SM = singlemode fiber, "E" = singlemode fiber, "XX" = ST or SC for fiber style connector, "-S" = -S for -20°C to 70°C operating temperature, leave blank for -40°C to 85°C operating temperature, "YY" = 15, 40, or 80 for 15km, 40km, or 80km SM fiber length.

# N-TRON

## Advanced Management Features

### Supported Models

N-Tron's advanced management features are standard on the **500 Series** with the **-A option**, and on the fully managed **700, 7000** and **9000 Series** switches. The **500-A Series** switches are configured using the serial COM port, while the **700, 7000** and **9000 Series** switches are configured using a web Browser, SNMP, or COM port. The **-A option** must be specified when ordering **500 Series** switches to receive advanced management features.

### IGMP Snooping

The **Internet Group Management Protocol (IGMP)** feature allows IGMP-capable switches to forward multicast traffic based on learned group addresses. IGMP Snooping and query auto detect modes are enabled by default. IGMP features include dynamic router discovery and master/slave redundancy for query detection. The ability to automatically detect bi-directional router ports and seamlessly form IGMP groups across multiple switches in a N-Tron network reduces, and in some cases, completely eliminates the need to configure the switch via the Command Line Interface in most Ethernet control networks.

### VLAN

**Virtual Local Area Network (VLAN)** allows the segmentation of the network in order to create two or more separate or overlapping local area network domains. N-Tron Industrial Ethernet switches with advanced management features can be setup for IEEE 802.1Q dynamic tagged VLAN, or pre-determined port VLAN.

### QoS

The **Quality of Service (QoS)** feature provides prioritization of network traffic in order to provide better network service. The primary goal of QoS is to minimize the latency of prioritized Ethernet packets required for ring management, real-time and other interactive applications.

### Trunking

Also known as link aggregation, **trunking** allows multiple physical ports to be linked together and function as one uplink to another Trunking capable switch configured in the same manner. The Trunking feature will increase the bandwidth between two switches and provides media redundancy.

### Port Mirroring

**Port mirroring** allows the traffic on one port to be duplicated and sent to a designated mirror port. Port mirroring can be used to monitor Ethernet traffic on the designated source port using the assigned mirror port.

### Port Control

**Port control** allows each port in the N-Tron switch to be enabled or disabled separately. Additionally, this feature supports individual configuration of full or half duplex, 10Mb/s or 100Mb/s for each port.

### Rapid Spanning Tree


**Rapid spanning tree** functionality permits the **700, 7000** or **9000 Series** switches to be configured in a ring or mesh topology. It also provides support for redundant path communications with rapid healing.



*Ordering Tip: Must specify 500-A, 700, 7000, or 9000 Series models to receive advanced management features.*




# N-View OPC Server Software

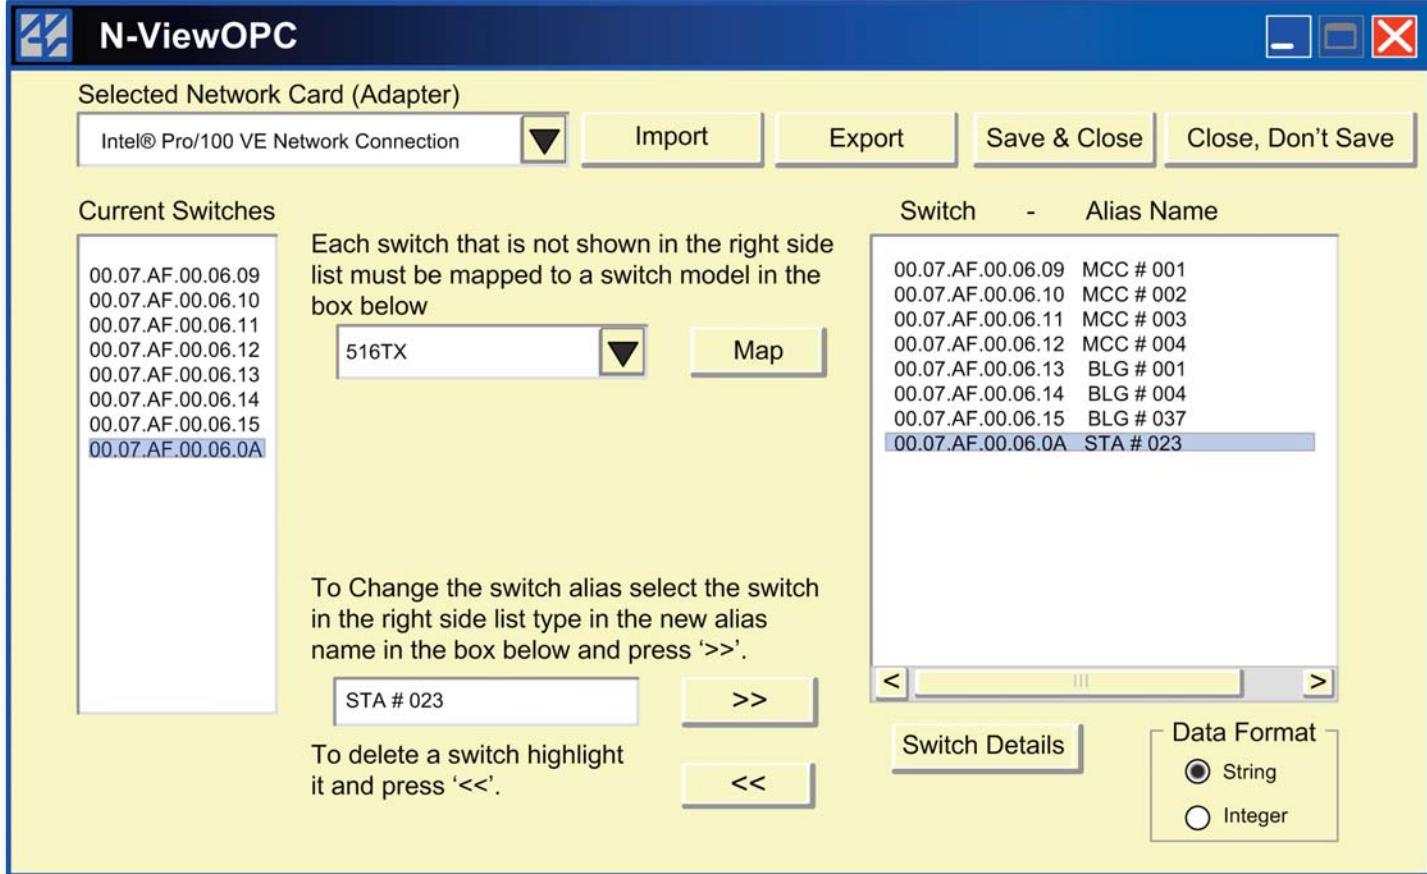

## Overview

The N-Tron N-View™ OLE for Process Control (OPC) Server Software will work with industry standard OPC Client software and most popular Human Machine Interface (HMI) packages, providing complete remote network traffic and status monitoring for N-Tron 300 and 500 Series Industrial Switches with the N-View Firmware option. N-View is available as a standard feature on all 700, 7000 and 9000 Series Switches. The N-View OPC Server in combination with one or more of our industrial switches will add complete network visibility to an HMI Control and Monitoring application.

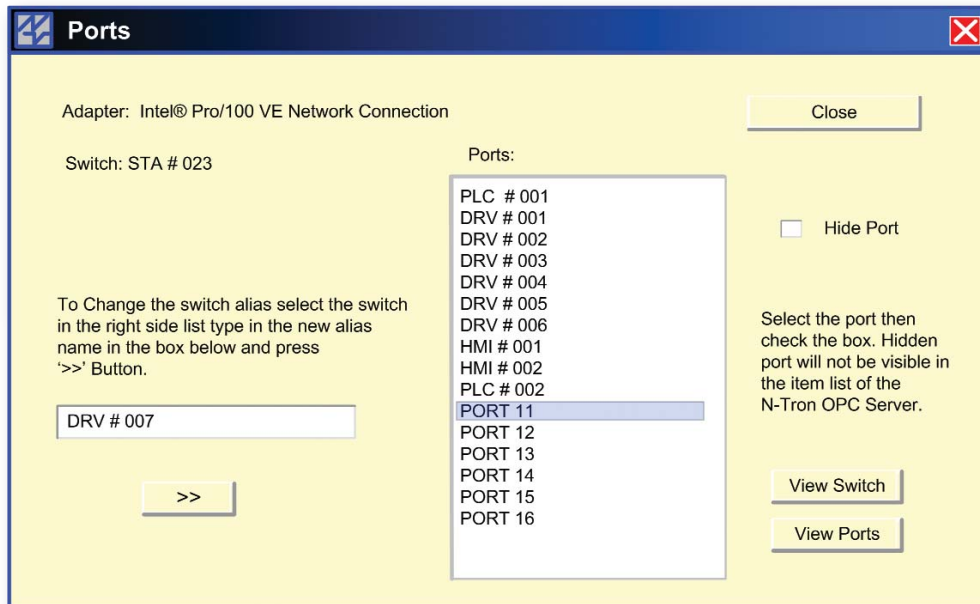

## N-View Switch Firmware

N-Tron Switches with the N-View firmware upgrade (part numbers with -A or -N extensions) will autocast a small Ethernet packet periodically containing port-by-port status of the switch. This information includes five switch level data points and 41 data points per port. This data is captured by the N-View OPC Server Software and can be displayed by application software running in the same Windows environment with OPC Client capability.

## Ease of Use

The N-Tron N-View Software includes the OPC Server and a configuration and monitoring software utility. This utility will automatically search the network for all N-View-enabled switches using the unique IEEE MAC addresses to identify each switch. The switch MAC address can be selected and assigned an 80 character alias name. Meaningful alias names can also be added to all ports using the configuration software. The switch and port alias names can be saved and used by the N-View OPC Server as part of the switch variable names. The alias names can be used to help identify the location of the switch and the areas or equipment connected to the ports.

Switch: STA # 023  
 IP Address: 192.168.1.61  
 N-Ring Version: 1 N-Ring Member: No  
 N-Ring Manager: Yes N-Ring State: Ok

Ports:	Links:	Speed:	Duplex:
PLC # 001	UP	100	FULL
DRV # 001	DOWN	NA	NA
DRV # 002	UP	100	FULL
DRV # 003	UP	100	FULL
DRV # 004	UP	100	FULL
DRV # 005	UP	100	FULL
DRV # 006	DOWN	NA	NA
HMI # 001	UP	10	HALF
HMI # 002	UP	10	HALF
PLC # 002	UP	100	FULL
I/O # 001	UP	100	FULL
I/O # 002	DOWN	NA	NA
DRV # 007	UP	100	FULL
DRV # 008	UP	100	FULL
I/O # 003	UP	100	FULL
CAM # 003	UP	10	HALF

## N-View OPC Data Variables

N-View OPC Server data variables can be accessed using N-View monitoring utility, or most popular HMI application software packages with OPC client capability. These variables can be divided into three general categories: **status variables** indicate the operating condition of the switch or port; **traffic variables** count the number of OCTETS (BYTES) of a specific type of Ethernet packet that have passed through a port since the start of the switch; and **error variables** count the number of packet errors seen at each port since the start of the switch. HMI software packages can convert these variables to the data type required for display, alarming and trending during the data scan update process.

Switch: STA # 023  
 IP Address: 192.168.1.61  
 Port: DRV # 007  
 Speed: 100 Link: Up N-Ring Version: 1 N-Ring Member: No  
 Duplex: Full Enable: Yes N-Ring Manager: Yes N-Ring State: Ok

Usage: 0 100% 5.34%

Select the port from the list below:

Tx Octets	4052024	Rx Octets	39844501556
Tx Dropped Packets	0	Rx Dropped Packets	0
Tx Broadcast Packets	568	Rx Broadcast Packets	0
Tx Multicast Packets	14346	Rx Multicast Packets	9
Tx Unicast Packets	2992	Rx Unicast Packets	17890849
Tx Collisions	0	Rx Undersize Packets	0
Tx Single Collision	0	Rx Oversize Packets	0
Tx Multiple Collision	0	Rx Jabbers	0
Tx Deferred	0	Rx Alignment Errors	0
Tx Late Collision	0	Rx Good Octets	3984501780
Tx Excessive	0	Rx SA Changes	0
Tx Frame In Disc	0	Rx FCS Errors	0
Tx Pause Packets	0	Rx Pause Packets	0
64 Packets	264937	Rx Fragments	0
65 to 127 Packets	2545888	RX Excessive Disc Size	101606610
128 to 255 Packets	10160661	Rx Symbol Errors	0
256 to 511 Packets	1442929	1024 to 1522 Packets	0
512 to 1023 Packets	3740131		

- PLC # 001
- DRV # 001
- DRV # 002
- DRV # 003
- DRV # 004
- DRV # 005
- DRV # 006
- HMI # 001
- HMI # 002
- PLC # 002
- I/O # 001
- I/O # 002
- DRV # 007
- DRV # 008
- I/O # 003
- CAM # 003**

# Industrial Wireless Ethernet with IEEE 802.11 a,b,g,n

N-Tron's 702-W and 702M12-W Industrial Wireless Ethernet Radios offers unprecedented throughput in industrial wireless applications. IEEE 802.11n support allows these radios to utilize three antennas and Multiple In, Multiple Out (MIMO) technology for increased throughput. N-Tron's wireless devices also support 802.11a/b/g compatibility for existing wireless networks. The radios can be configured to operate as a wireless Station, Station WDS, Access Point, or Access Point WDS and will operate in either Bridge or Router mode within the network. Configured as a mobile station, the wireless device roams from one access point to another as signal strength becomes too weak or service becomes interrupted. Power over Ethernet (PoE) technology allows the 702-W or 702M12-W to receive power through the Cat5e cable from a PoE sourcing device such as N-Tron's 105TX-POE Switch. Network deployments are much easier using wireless and PoE technology because only one Cat5e cable is required. The 702M12-W's IP67 rated enclosure with M12 connectors provides complete protection against dust, water jets and temporary immersion in water making it ideal for outdoor, wash down, or extremely dusty environments. All are UL listed for use in Class I, Division 2 Hazardous locations.



## 702-W

- One 10/100BaseTX RJ-45 Port
- Three Antennas for 3x3 MIMO Operations
- 802.3af PoE Powered Device
- Case Dimensions (4.8" h x 7.0" w x 1.2" d, 1.9 lbs.)
- -40°C to 70°C Operating Temperature
- Web Browser Management
- Data Rates: Legacy 802.11a/b/g = 1-54Mbps  
802.11n = up to 300Mbps
- Network Modes: Bridge or Router
- Wireless Modes: Station, Station WDS, Access Point, Access Point WDS
- Range: Indoor greater than 300m\*  
Outdoor greater than 60km\*
- Security: 802.11i with AES-CCM & TKIP Encryption  
802.1x, 64/128 bit WEP
- Redundant Power Inputs 20-49 VDC, 200mA @ 24V
- Order Part #702-W

## 702M12-W

- One 10/100BaseTX M12 Port
- IP67 Rated Enclosure - Protected Against Dust, Low/High Pressure Water Jets and Temporary Immersion in Water
- 802.3af PoE Powered Device
- Case Dimensions (6.7" h x 6.7" w x 1.8" d, 3.5 lbs.)
- -40°C to 70°C Operating Temperature
- Web Browser Management
- Data Rates: Legacy 802.11a/b/g = 1-54Mbps  
802.11n = up to 300Mbps
- Network Modes: Bridge or Router
- Wireless Modes: Station, Station WDS, Access Point, Access Point WDS
- Range: Indoor greater than 300m\*  
Outdoor greater than 60km\*
- Security: 802.11i with AES-CCM & TKIP Encryption  
802.1x, 64/128 bit WEP
- Redundant Power Inputs 20-49 VDC, 200mA @ 24V
- Order Part #702M12-W

# IP67 Rated Fully Managed Ethernet

Housed in an IP67-rated metal enclosure, the fully managed 708M12 is ideally suited for connecting Ethernet enabled devices in railway, industrial, marine and security applications. The IP67-rated enclosure provides protection against dust, low and high pressure water jets and temporary immersion in water. All 708M12 models are EN50155 certified for railway applications. Standard voltage models are UL Listed for use in Class I, Division 2 hazardous locations and have ABS and DNV Type Approval for maritime environments. High voltage models are TÜV/GS certified.




## 708M12

- Eight 10/100BaseTX M12-D Coded Ports
- IP67 Rated for Protection Against Dust, Water Jets and Temporary Immersion in Water
- Case Dimensions (6.7" h x 6.7" w x 1.8" d, 3.4 lbs.)
- -40°C to 80°C Operating Temperature
- SNMP v1, v2, v3 and Web Configuration including MAC Filters and IGMP Groups
- GUI Based DHCP Server with Option 61, Option 82 Relay Agent, Local IP Static Addressing and IP Fallback
- N-Link Redundant N-Ring Coupling
- Port Security - MAC Address Based
- Advanced Features: IGMP Auto Config., VLAN, QoS, Trunking, Mirroring, 802.1D RSTP, LLDP, & EtherNet/IP CIP Messaging
- Ring Manager using N-Tron's N-Ring Technology offers a Standard Healing Time of ~30ms
- N-View OPC Monitoring with Fault Status for Ring Managers
- Redundant Power Inputs 10-30 VDC, 250mA @ 24V, or 40-160 VDC, 62mA @ 124 V for High Voltage Model
- Order Part #708M12 or 708M12-HV for High Voltage Model



N-Tron 700 Series made in the USA.

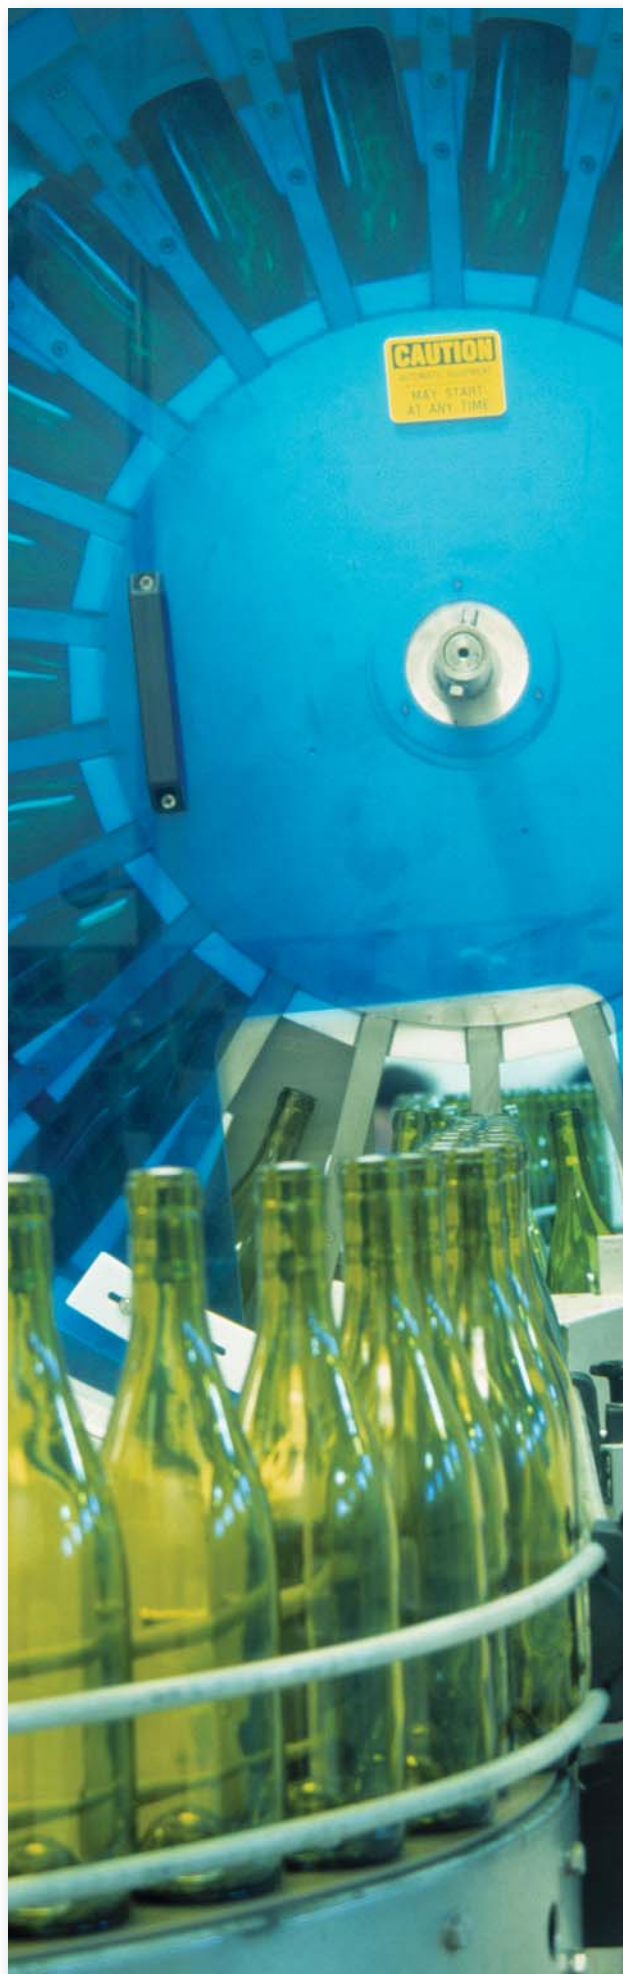

# Fully Managed Fast Ethernet with SNMP V3 & DHCP Server Option 82

The N-Tron 700 Series Fully Managed Industrial Fast Ethernet Switches are affordably priced to fit any networking budget while offering outstanding management and monitoring features. They are ideally suited for use as a Ring Manager or anywhere a managed switch is required. The 700 Series comes standard with fully managed features like plug-and-play IGMP Snooping, VLAN, QoS, Port Mirroring, Port Trunking, 802.1D RSTP, DHCP Server with Option 82 and N-Ring. When used as a Ring Manager, N-Tron's N-Ring technology provides detailed fault diagnostics, expanded ring size capacity and ~30ms ring healing. Added control features such as full SNMP V3, Web Browser Management and N-View OPC Remote Monitoring provide all of the tools necessary to simplify configuration and diagnostics of the N-Tron switches. The Industrially hardened construction of the 700 series results in an impressive operating temperature of -40°C to 70°C or above allowing them to be placed in the harshest of applications. All models below are EN50155 certified for railway applications. Standard voltage models are UL Listed for use in Class I, Division 2 hazardous locations. High voltage models are TÜV/GS certified. In addition to ATEX Type Certification, the 708TX and 708FX2 have ABS and DNV Type Approval for maritime environments.



ABB Industrial IT™ Certified

## 708TX

- Eight 10/100BaseTX RJ-45 Copper Ports
- Auto Sensing 10/100BaseTX, Duplex and MDIX
- Case Dimensions (2.3" h x 6.0" w x 3.8" d, 1.7 lbs.)
- -40°C to 85°C Operating Temperature
- SNMP v1, v2, v3 and Web Configuration including MAC Filters and IGMP Groups
- GUI Based DHCP Server with Option 61, Option 82 Relay Agent, Local IP Static Addressing and IP Fallback
- N-Link Redundant N-Ring Coupling
- Port Security - MAC Address Based
- Advanced Features: IGMP Auto Config., VLAN, QoS, Trunking, Mirroring, 802.1D RSTP, LLDP & EtherNet/IP CIP Messaging
- Ring Manager using N-Tron's N-Ring Technology offers a Standard Healing Time of ~30ms
- N-View OPC Monitoring with Fault Status for Ring Managers
- Redundant Power Inputs 10-30 VDC, 250mA @ 24V
- Order Part #708TX

## 708FX2

- Six 10/100BaseTX RJ-45 Copper Ports
- Two 100BaseFX ST or SC Full Duplex Ports
- Case Dimensions (2.3" h x 6.0" w x 3.8" d, 1.7 lbs.)
- -40°C to 85°C Operating Temperature
- SNMP v1, v2, v3 and Web Configuration including MAC Filters and IGMP Groups
- GUI Based DHCP Server with Option 61, Option 82 Relay Agent, Local IP Static Addressing and IP Fallback
- N-Link Redundant N-Ring Coupling
- Port Security - MAC Address Based
- Advanced Features: IGMP Auto Config., VLAN, QoS, Trunking, Mirroring, 802.1D RSTP, LLDP & EtherNet/IP CIP Messaging
- Ring Manager using N-Tron's N-Ring Technology offers a Standard Healing Time of ~30ms
- N-View OPC Monitoring with Fault Status for Ring Managers
- Redundant Power Inputs 10-30 VDC, 330mA @ 24V
- Order MM Part #708FX2-XX  
Order SM Part #708FXE2-XX-YY



N-Tron 700 Series made in the USA.





## 716TX

- Sixteen 10/100BaseTX RJ-45 Copper Ports
- Auto Sensing 10/100BaseTX, Duplex and MDIX
- Case Dimensions (2.3" h x 8.3" w x 4.8" d, 3.3 lbs.)
- -40°C to 70°C Operating Temperature
- SNMP v1, v2, v3 and Web Configuration including MAC Filters and IGMP Groups
- GUI Based DHCP Server with Option 61, Option 82 Relay Agent, Local IP Static Addressing and IP Fallback
- N-Link Redundant N-Ring Coupling
- Port Security - MAC Address Based
- Advanced Features: IGMP Auto Config., VLAN, QoS, Trunking, Mirroring, 802.1D RSTP, LLDP & EtherNet/IP CIP Messaging
- Ring Manager using N-Tron's N-Ring Technology offers a Standard Healing Time of ~30ms
- N-View OPC Monitoring with Fault Status for Ring Managers
- Redundant Power Inputs: 10-30 VDC, 620mA @ 24V, or 40-160 VDC, 160mA @ 124V for High Voltage Model
- Order Part #716TX or #716TX-HV for High Voltage Model

## 716FX2

- Fourteen 10/100BaseTX RJ-45 Copper Ports
- Two 100BaseFX ST or SC Full Duplex Ports
- Case Dimensions (2.3" h x 8.3" w x 4.8" d, 3.3 lbs.)
- -40°C to 70°C Operating Temperature
- SNMP v1, v2, v3 and Web Configuration including MAC Filters and IGMP Groups
- GUI Based DHCP Server with Option 61, Option 82 Relay Agent, Local IP Static Addressing and IP Fallback
- N-Link Redundant N-Ring Coupling
- Port Security - MAC Address Based
- Advanced Features: IGMP Auto Config., VLAN, QoS, Trunking, Mirroring, 802.1D RSTP, LLDP & EtherNet/IP CIP Messaging
- Ring Manager using N-Tron's N-Ring Technology offers a Standard Healing Time of ~30ms
- N-View OPC Monitoring with Fault Status for Ring Managers
- Redundant Power Inputs: 10-30 VDC, 620mA @ 24V, or 40-160 VDC, 160mA @ 124V for High Voltage Models
- Order MM Part #716FX2-XX-VV  
Order SM Part #716FXE2-XX-YY-VV

Ordering Key: MM = multimode fiber, SM = singlemode fiber, "E" = singlemode fiber, "XX" = ST or SC for fiber style connector, "YY" = 15, 40, or 80 for 15km, 40km, or 80km SM fiber length, "VV" = HV for High voltage option, otherwise leave blank.

# Compact Fully Managed Ethernet with Multiple Fiber Ports for Long Distance Operation

Housed in compact, hardened enclosures, the 709FX, 710FX2, 711FX3, 712FX4 and 714FX6 were designed to meet the rigorous requirements of wind farms, utilities—including power substations—and other industrial process control applications where noise immunity and support for longer distances are essential. Packed with N-Tron’s robust fully managed feature set that includes Port Security, IGMP Snooping, VLAN, QoS, Port Mirroring, Port Trunking, 802.1D RSTP, DHCP Server with Option 82, and N-Ring, this fully managed series offers up to six fiber ports.

For added convenience, an optional SD card may be purchased for saving or restoring the switch configuration. These models are UL Listed for use in Class I, Division 2 hazardous locations.



## 709FX

- Eight RJ-45 10/100BaseTX Ports
- One 100BaseFX, ST or SC Full Duplex Port
- DIN-Rail Case Dimensions (4.3" h x 2.4" w x 4.6" d, 1.4 lbs.)
- -40°C to 70°C Operating Temp. Includes Onboard Temp Sensor
- Redundant Power Inputs: 10-49 VDC, 365 mA @ 24V
- Port Security - MAC Address Based
- DHCP Server, Option 82 Relay, Option 61 and IP Fallback
- SNMP v1, v2, v3 and Web Browser Management
- N-View OPC Monitoring with Fault Status for Ring Managers
- IGMP Auto Config., VLAN, LLDP, QoS, Trunking, Mirroring
- 802.1D RSTP, N-Link, N-Ring, EtherNet/IP CIP Messaging
- Order MM Part #709FX-XX  
Order SM Part #709FXE-XX-YY

## 710FX2

- Eight RJ-45 10/100BaseTX Ports
- Two 100BaseFX, ST or SC Full Duplex Ports
- DIN-Rail Case Dimensions (4.3" h x 2.4" w x 4.6" d, 1.4 lbs.)
- -40°C to 70°C Operating Temp. Includes Onboard Temp Sensor
- Redundant Power Inputs: 10-49 VDC, 415 mA @ 24V
- Port Security - MAC Address Based
- DHCP Server, Option 82 Relay, Option 61 and IP Fallback
- SNMP v1, v2, v3 and Web Browser Management
- N-View OPC Monitoring with Fault Status for Ring Managers
- IGMP Auto Config., VLAN, LLDP, QoS, Trunking, Mirroring
- 802.1D RSTP, N-Link, N-Ring, EtherNet/IP CIP Messaging
- Order MM Part #710FX2-XX  
Order SM Part #710FXE2-XX-YY

## 711FX3

- Eight RJ-45 10/100BaseTX Ports
- Three 100BaseFX, ST or SC Full Duplex Ports
- DIN-Rail Case Dimensions (4.3" h x 2.4" w x 4.6" d, 1.4 lbs.)
- -40°C to 70°C Operating Temp. Includes Onboard Temp Sensor
- Redundant Power Inputs: 10-49 VDC, 455mA @ 24V
- Port Security - MAC Address Based
- DHCP Server, Option 82 Relay, Option 61 and IP Fallback
- SNMP v1, v2, v3 and Web Browser Management
- N-View OPC Monitoring with Fault Status for Ring Managers
- IGMP Auto Config., VLAN, LLDP, QoS, Trunking, Mirroring
- 802.1D RSTP, N-Link, N-Ring, EtherNet/IP CIP Messaging
- Order MM Part #711FX3-XX  
Order SM Part #711FXE3-XX-YY



N-Tron 700 Series made in the USA.



Choose up to six fiber ports

## 712FX4

- Eight RJ-45 10/100BaseTX Ports
- Four 100BaseFX, ST or SC Full Duplex Ports
- DIN-Rail Case Dimensions (4.3" h x 3.1" w x 4.6" d, 1.8 lbs.)
- -40°C to 70°C Operating Temp. Includes Onboard Temp Sensor
- Redundant Power Inputs: 10-49 VDC, 505 mA @ 24V
- Port Security - MAC Address Based
- DHCP Server, Option 82 Relay, Option 61 and IP Fallback
- SNMP v1, v2, v3 and Web Browser Management
- N-View OPC Monitoring with Fault Status for Ring Managers
- IGMP Auto Config., VLAN, LLDP, QoS, Trunking, Mirroring
- 802.1D RSTP, N-Link, N-Ring, EtherNet/IP CIP Messaging
- Order MM Part #712FX4-XX  
Order SM Part #712FXE4-XX-YY

## 714FX6

- Eight RJ-45 10/100BaseTX Ports
- Six 100BaseFX, ST or SC Full Duplex Ports
- DIN-Rail Case Dimensions (4.3" h x 3.1" w x 4.6" d, 1.8 lbs.)
- -40°C to 70°C Operating Temp. Includes Onboard Temp Sensor
- Redundant Power Inputs 10-49 VDC, 610 mA @ 24V
- Port Security - MAC Address Based
- DHCP Server, Option 82 Relay, Option 61 and IP Fallback
- SNMP v1, v2, v3 and Web Browser Management
- N-View OPC Monitoring with Fault Status for Ring Managers
- IGMP Auto Config., VLAN, LLDP, QoS, Trunking, Mirroring
- 802.1D RSTP, N-Link, N-Ring, EtherNet/IP CIP Messaging
- Order MM Part #714FX6-XX  
Order SM Part #714FXE6-XX-YY

Fiber is Ideal for installations covering a wide area due to its high noise immunity properties and ability to provide seamless communications over long distances.

Designed to solve the most demanding communications requirements, N-Tron products are used throughout the world in a wide of variety of applications including wind farms, solar energy, nuclear power plants, wastewater treatment facilities, transportation, process control, security and surveillance.

Ordering Key: MM = multimode fiber, SM = singlemode fiber, "E" = singlemode fiber, "XX" = ST or SC for fiber style connector, "YY" = 15, 40, or 80 for 15km, 40km, or 80km SM fiber length.

# Feature Rich Compact Series includes Gigabit Capabilities & Advanced Management

Small and powerful, the 7010TX and 7012FX2 provide up to two gigabit ports, two fiber ports and eight copper ports for maximum flexibility in industrial environments. These models join the 709FX, 710FX2, 711FX3, 712FX4 and 714FX6 in the fully-managed product line—all small form, feature-rich models with advanced network management functionality and outstanding reliability.

With support for multiple fiber connections, the 7010TX and 7012FX2 provide the expanded capabilities needed to handle the higher speeds and larger data files inherent in high-bandwidth networks while maintaining the toughness required to operate in extreme environments. Both units contain two gigabit ports which accept optional copper, and multimode or singlemode fiber SFP transceivers.



## 7010TX

- Eight 10/100BaseTX RJ-45 Copper Ports
- Auto Sensing 10/100BaseTX, Duplex and MDIX
- Two Optional 1000BaseSX/LX/T Gigabit SFP Transceivers
- Case Dimensions (4.3" h x 2.4" w x 4.6" d, 1.4 lbs.)
- -40°C to 70°C Operating Temperature Includes Onboard Temperature Sensor
- Redundant Power Inputs 10-49 VDC, 410 mA @ 24V
- Port Security - MAC Address Based
- DHCP Server, Option 82 Relay, Option 61 and IP Fallback
- SNMP v1, v2, v3 and Web Browser Management
- N-View OPC Monitoring with Fault Status for Ring Managers
- IGMP Auto Config., VLAN, LLDP, QoS, Trunking, Mirroring
- 802.1D RSTP, N-Link, N-Ring, EtherNet/IP CIP Messaging
- Order Part #7010TX  
See page 37 for SFP options


## 7012FX2

- Eight 10/100BaseTX RJ-45 Copper Ports
- Two 100BaseFX ST or SC Full Duplex Ports
- Two Optional 1000BaseSX/LX/T Gigabit SFP Transceivers
- Case Dimensions (4.3" h x 3.1" w x 4.6" d, 1.4 lbs.)
- -40°C to 70°C Operating Temperature Includes Onboard Temperature Sensor
- Redundant Power Inputs 10-49 VDC, 525 mA @ 24V
- Port Security - MAC Address Based
- DHCP Server, Option 82 Relay, Option 61 and IP Fallback
- SNMP v1, v2, v3 and Web Browser Management
- N-View OPC Monitoring with Fault Status for Ring Managers
- IGMP Auto Config., VLAN, LLDP, QoS, Trunking, Mirroring
- 802.1D RSTP, N-Link, N-Ring, EtherNet/IP CIP Messaging
- Order MM Part #7012FX2-XX or SM Part #7012FXE2-XX-YY  
See page 37 for SFP options



N-Tron 7000 Series made in the USA.



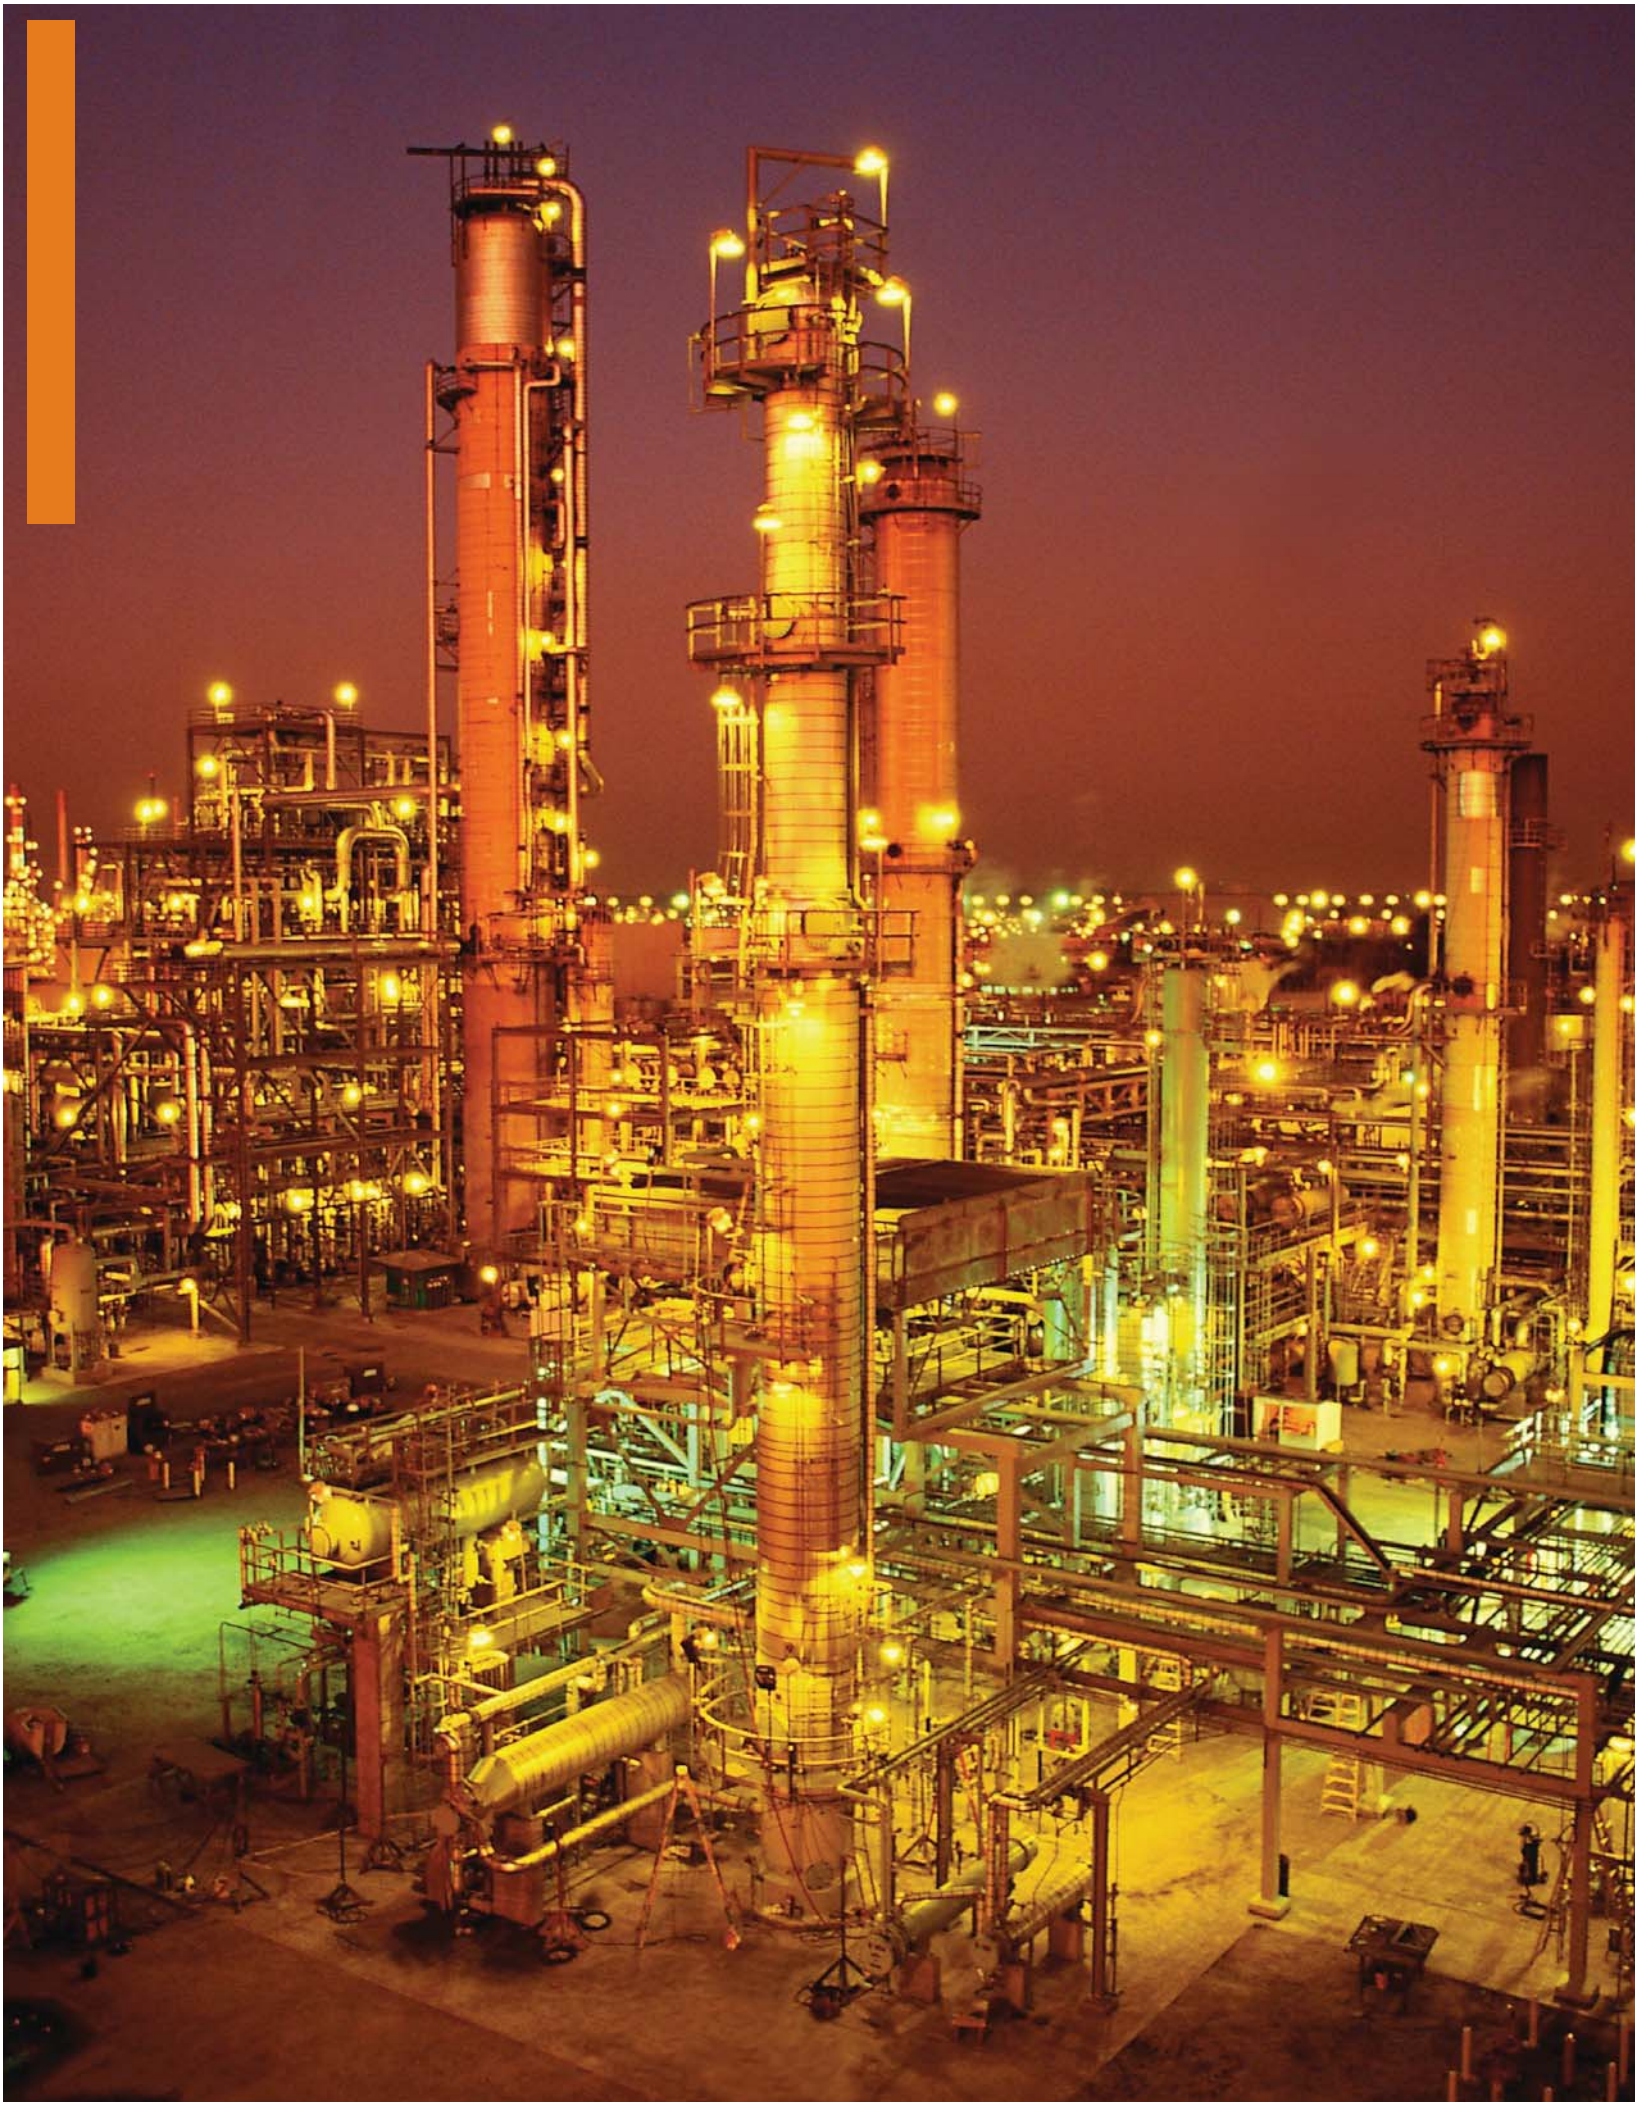

# Fully Managed Gigabit Ethernet with SNMP V3 & DHCP

The N-Tron 7000 Series is ideal for use as either a fully managed fiber optic Ring Manager or Ring Member. These gigabit capable industrial Ethernet switches carry N-Tron's exclusive N-Ring™ technology providing detailed fault diagnostics, expanded ring size capacity and ~30ms ring healing. When using all N-Tron fully managed switches in a ring, a detailed ring map and fault location chart will be provided on the Ring Manager's web browser and OPC Server to identify the health status of the ring. In addition to N-Ring, the 7000 Series offers fully managed features such as IGMP Snooping, VLAN, QoS, Port Mirroring, Port Trunking, 802.1D-2004 fast RSTP, DHCP and N-Ring. For ease of monitoring, configuration and diagnostics N-Tron's N-View OPC Server Software, SNMP V3 and Web Browser Management come standard on all 7000 Series Switches. N-View can be combined with popular HMI software packages to add network traffic monitoring, trending and alarming to any application using N-Tron switches. For added bandwidth and flexibility, the 7000 Series provides two optional Gigabit fiber or copper SFP transceivers, installable in our factory at the time of purchase or upgraded later in the field. Standard voltage models are UL Listed for use in Class I, Division 2 hazardous locations. High voltage models are TÜV/GS certified.



Products shown with optional Gigabit SFP Transceivers installed

## 7018TX

- Sixteen 10/100BaseTX RJ-45 Copper Ports
- Up to Two Optional Full Duplex 1000BaseSX/LX Gigabit and/or Two Optional 1000BaseT Gigabit SFP Transceivers
- Auto Sensing 10/100BaseTX, Duplex and MDIX
- Case Dimensions (2.3" h x 8.3" w x 4.8" d, 3.3 lbs.)  
-40°C to 70°C Operating Temperature
- SNMP v1, v2, v3 and Web Configuration including MAC Filters and IGMP Groups
- GUI Based DHCP Server with Option 61, Option 82 Relay Agent, Local IP Static Addressing and IP Fallback
- N-Link Redundant N-Ring Coupling plus N-View OPC Monitoring with Fault Status for Ring Managers
- Port Security - MAC Address Based
- Advanced Features: IGMP Auto Config., VLAN, QoS, Trunking, Mirroring, 802.1D RSTP, LLDP, & EtherNet/IP CIP Messaging
- Ring Manager using N-Tron's N-Ring Technology offers a Standard Healing Time of ~30ms
- Redundant Power Inputs: 10-30 VDC, 520mA @ 24V, or 40-160 VDC, 160mA @ 124V for High Voltage Model
- Order Part #7018TX | #7018TX-HV for High Voltage Model  
Order TX Gigabit SFP Transceiver Part #NTSFP-TX
- Order MM Gigabit SFP Transceiver Part #NTSFP-SX  
Order SM Gigabit SFP Transceiver Part #NTSFP-LX-ZZ

## 7018FX2

- Fourteen 10/100BaseTX RJ-45 Copper Ports
- Two 100BaseFX Full Duplex Fiber Optic Ports
- Up to Two Optional Full Duplex 1000BaseSX/LX Gigabit and/or Two Optional 1000BaseT Gigabit SFP Transceivers
- Case Dimensions (2.3" h x 8.3" w x 4.8" d, 3.3 lbs.)  
-40°C to 70°C Operating Temperature
- SNMP v1, v2, v3 and Web Configuration including MAC Filters and IGMP Groups
- GUI Based DHCP Server with Option 61, Option 82 Relay Agent, Local IP Static Addressing and IP Fallback
- N-Link Redundant N-Ring Coupling plus N-View OPC Monitoring with Fault Status for Ring Managers
- Port Security - MAC Address Based
- Advanced Features: IGMP Auto Config., VLAN, QoS, Trunking, Mirroring, 802.1D RSTP, LLDP, & EtherNet/IP CIP Messaging
- Ring Manager using N-Tron's N-Ring Technology offers a Standard Healing Time of ~30ms
- Redundant Power Inputs: 10-30 VDC, 520mA @ 24V, or 40-160 VDC, 160mA @ 124V for High Voltage Models
- Order MM Part #7018FX2-XX-VV | SM Part #7018FXE2-XX-YY-VV  
Order TX Gigabit SFP Transceiver Part #NTSFP-TX
- Order MM Gigabit SFP Transceiver Part #NTSFP-SX  
Order SM Gigabit SFP Transceiver Part #NTSFP-LX-ZZ



N-Tron 7000 Series made in the USA.

Ordering Key: MM = multimode fiber, SM = singlemode fiber, "E" = singlemode fiber, "XX" = SI or SC for fiber style connector, "YY" = 15, 40, or 80 for 15km, 40km, or 80km SM fiber length, "VV" = HV for High voltage option, otherwise leave blank, "ZZ" = 10, 40, or 80 for 10km, 40km, or 80km Gigabit Singlemode fiber length.

# 26-Port, Fully Managed Rackmount Industrial Ethernet

N-Tron's 7026TX Fully Managed Industrial Ethernet Switch combines ultrafast gigabit performance with a sleek 1U design to deliver an excellent rackmount solution for SCADA, factory floor automation, transportation, utilities and security/video surveillance applications. The 7026TX-AC model also makes an ideal choice for machine builders because of its high voltage AC and DC powered design.

With a powerful combination of twenty-four (24) 10/100BaseTX copper ports and two (2) SFP gigabit ports, these units are ideal for high-traffic industrial environments where maximum throughput, superior noise immunity and extreme ruggedness are required. The 7026TX Series is UL Listed for use in Class I, Division 2 hazardous locations.




## 7026TX / 7026TX-AC

- Twenty-four 10/100BaseTX RJ-45 Copper Ports
- Two Optional Full Duplex 1000BaseSX/LX Gigabit SFP (Mini-GBIC) Transceivers or Two Optional 1000BaseT Gigabit SFP Transceivers
- Rugged Industrial 19" Rackmount Enclosure - Case Dimensions (1.8"h x 16.1"w x 5.4"d, 5.5 lbs.)
- -40°C to 80°C Operating Temperature (includes onboard temperature sensor)
- ESD and Surge Protection Diodes, Auto-Sensing 10/100BaseTX, Duplex and MDIX on all RJ-45 Ports
- Configuration backup via Optional SD card (Part # NTCD-128)
- Fault Relay Support and Configurable Bi-Color Fault Status LED
- N-Ring Technology with ~30ms Healing and N-Link Redundant Ring Coupling
- SNMP v1, v2, v3 and Web Browser Management plus N-View OPC Monitoring with Fault Status for Ring Managers
- DHCP Server, Option 82 Relay, Option 61, IP Fallback, Local Port IP Addressing, Port Security - MAC Address Based
- Advanced Management Features: IGMP Auto Configuration, VLAN, DSCP, LLDP, QoS, Trunking, Mirroring, 802.1D RSTP
- Regulated Power Inputs: 18-49VDC, 605mA @ 24VDC (redundant)  
90-264VAC, 215mA @ 120VAC / 90-300VDC, 110mA @ 124VDC
- Order Part #7026TX for 18-49VDC or #7026TX-AC for 90-264VAC powered model (see accessories page 37 for SFP options)





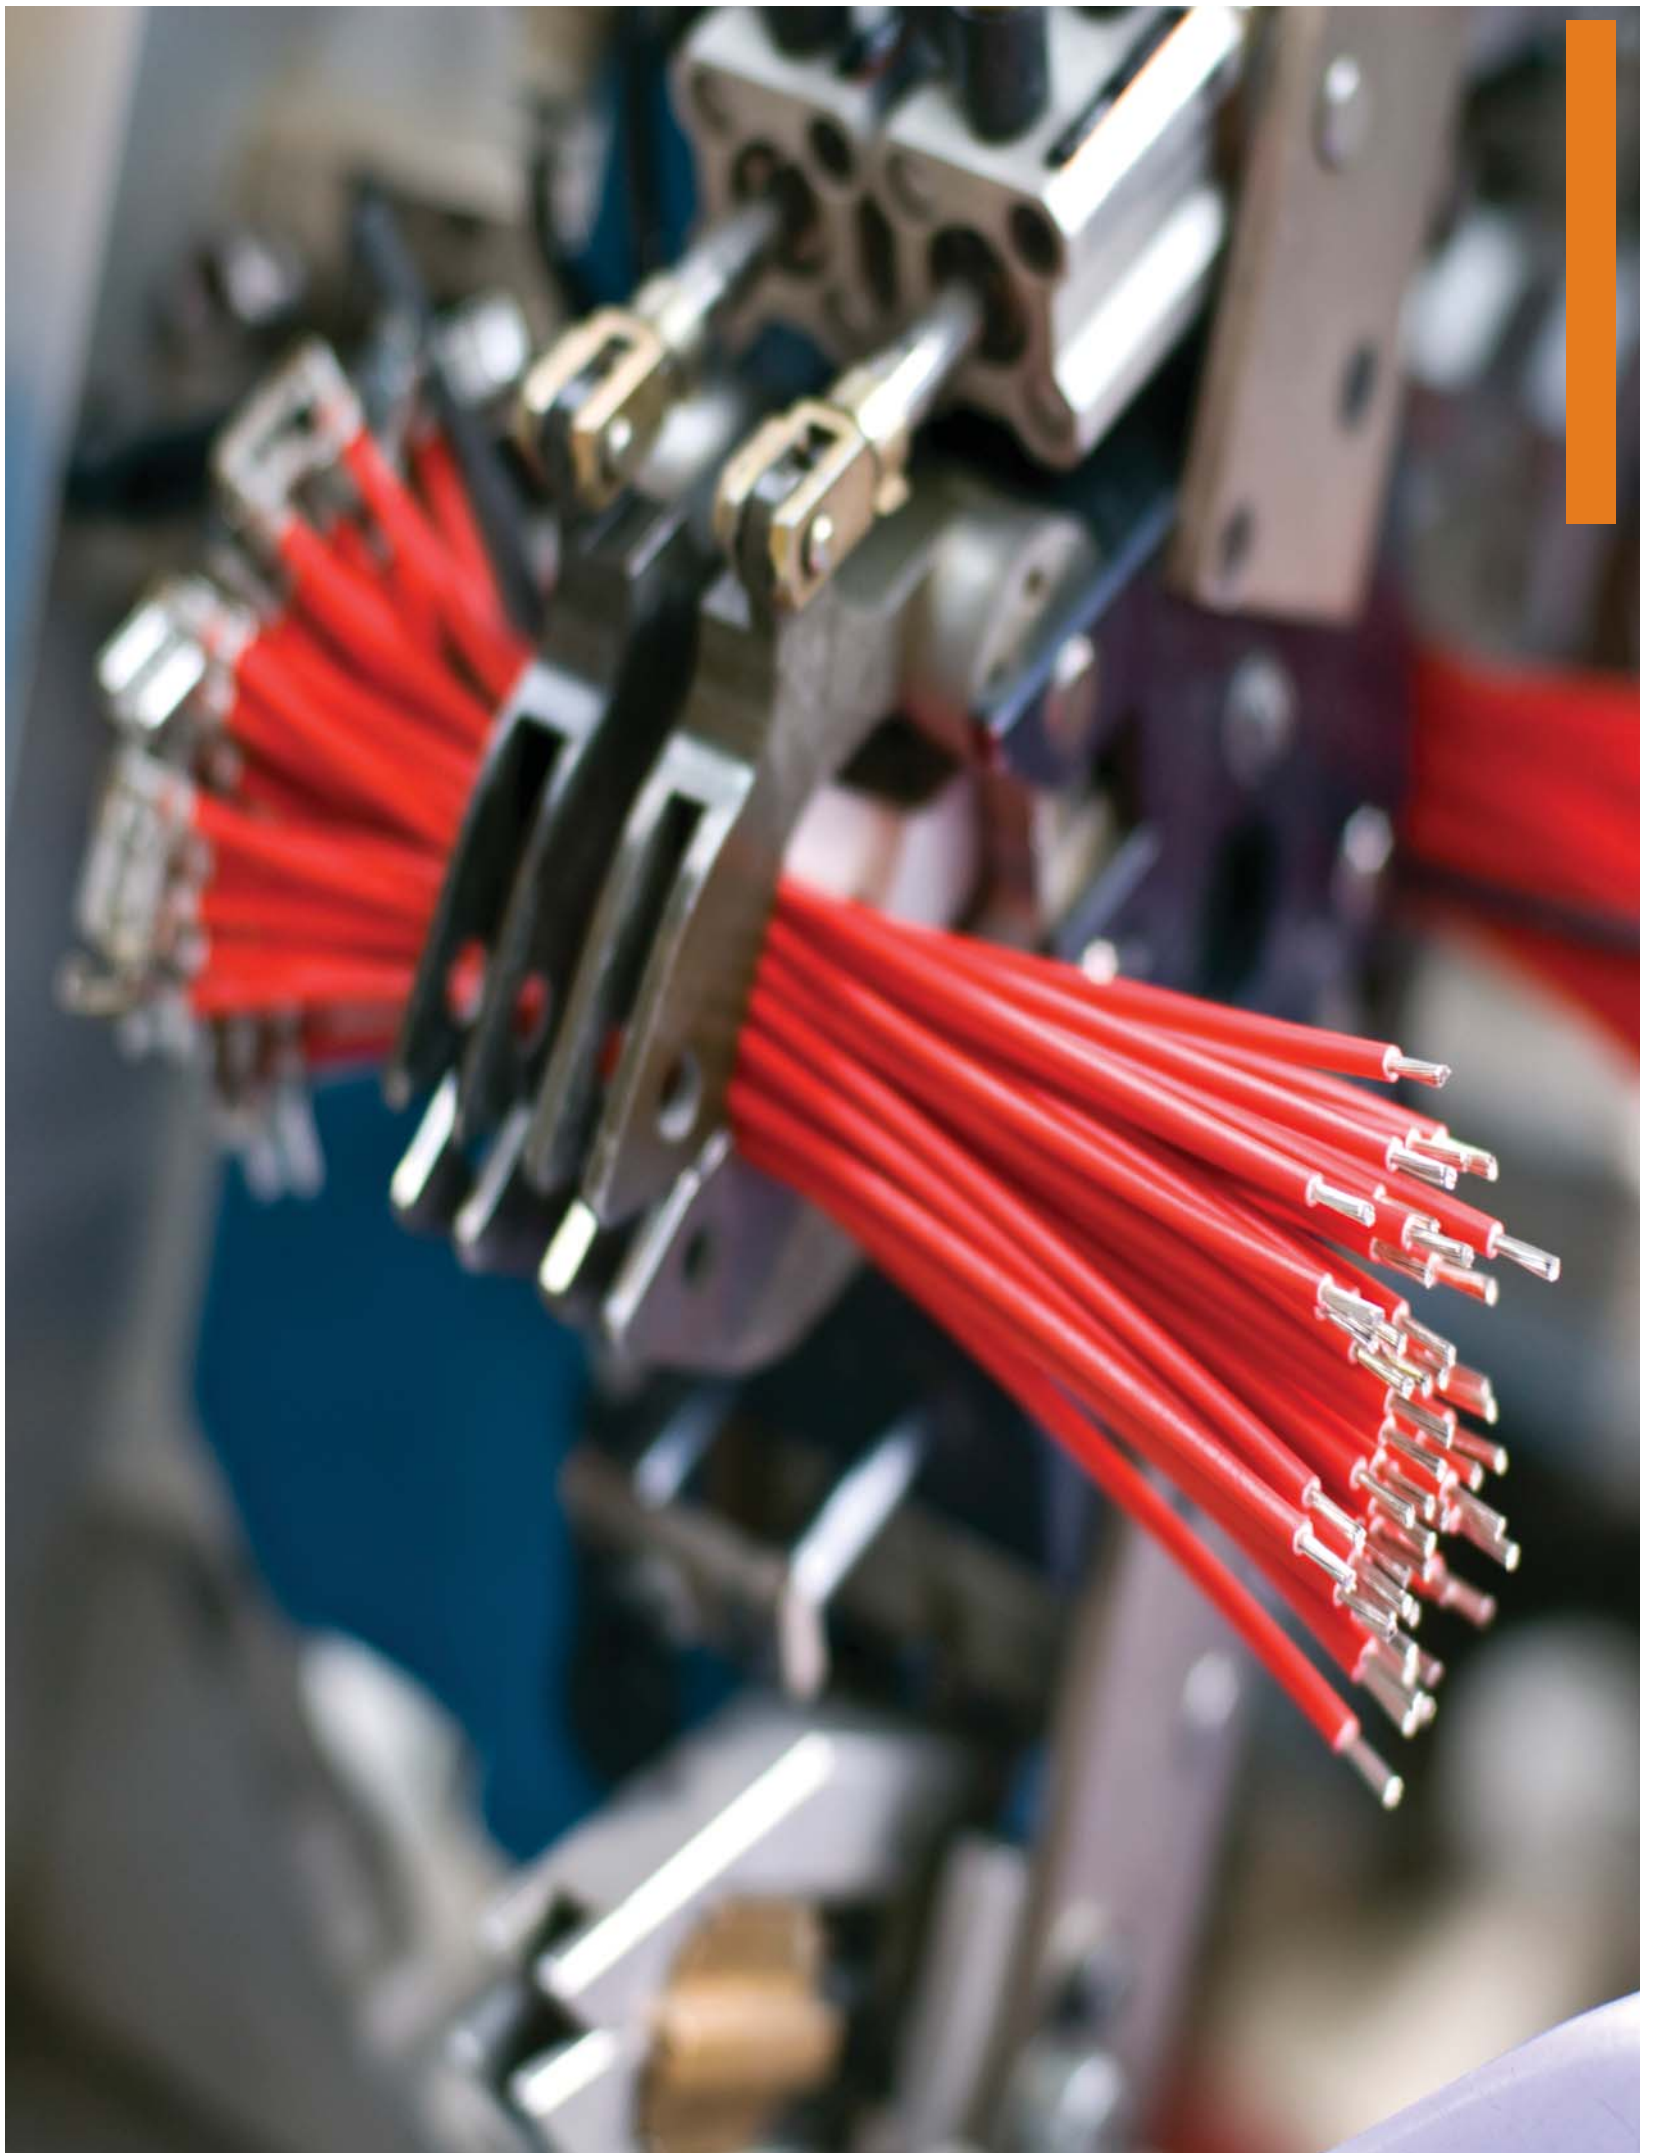

# N-Ring Health Diagnostics

N-Ring OK!!					
N-Ring Status View					
Switch is an N-Ring Manager					
Switch No	MAC Address	IP Address	Subnet Mask	Name	Ports
RM	<a href="#">00:07:af:ff:f6:e0</a>	192.168.1.136	255.255.255.0	N-TRON Switch	A2 A1
1	<a href="#">00:07:af:ff:f6:40</a>	192.168.1.131	255.255.255.0	N-TRON Switch	A1 A2
2	<a href="#">00:07:af:ff:f6:60</a>	192.168.1.132	255.255.255.0	N-TRON Switch	A2 A1
3	<a href="#">00:07:af:ff:f6:80</a>	192.168.1.133	255.255.255.0	N-TRON Switch	A1 A2
4	<a href="#">00:07:af:ff:f6:a0</a>	192.168.1.134	255.255.255.0	N-TRON Switch	A2 A1
5	<a href="#">00:07:af:ff:f6:c0</a>	192.168.1.135	255.255.255.0	N-TRON Switch	A1 A2

N-Ring™ is an exclusive feature of the N-Tron 700, 7000 and 9000 Series Ethernet Switches offering detailed diagnostics, expanded ring size capacity and ~30ms ring healing time. When using N-Tron’s fully managed switches in a ring topology, a detailed ring map will appear on the Ring Manager’s web browser to identify the health status of the ring. The order of switches and ports is dynamically generated when using N-Tron’s fully managed switches to create the ring. The chart to the left shows a healthy ring status view indicating that all of the switches in the ring are communicating and no breaks have been detected.

The map to the right shows a N-Ring fault status view indicating that a fault has been detected in the N-Tron fully managed network. This fault map shows a communication error has occurred between the A2 port of Switch 1 and the A2 port of Switch 2. In this case the Ring manager declared a fault and converted the ring to a fiber optic backbone within ~30ms, allowing communication of the ring to continue until the declared switches and cable segments can be evaluated and repaired in the field.

N-Ring Fault!					
N-Ring Status View					
Switch is an N-Ring Manager					
Switch No	MAC Address	IP Address	Subnet Mask	Name	Ports
RM	<a href="#">00:07:af:ff:f6:e0</a>	192.168.1.136	255.255.255.0	N-TRON Switch	A2 A1
1	<a href="#">00:07:af:ff:f6:40</a>	192.168.1.131	255.255.255.0	N-TRON Switch	A1 A2
2	<a href="#">00:07:af:ff:f6:60</a>	192.168.1.132	255.255.255.0	N-TRON Switch	A2 A1
3	<a href="#">00:07:af:ff:f6:80</a>	192.168.1.133	255.255.255.0	N-TRON Switch	A1 A2
4	<a href="#">00:07:af:ff:f6:a0</a>	192.168.1.134	255.255.255.0	N-TRON Switch	A2 A1
5	<a href="#">00:07:af:ff:f6:c0</a>	192.168.1.135	255.255.255.0	N-TRON Switch	A1 A2


# EtherNet/IP with CIP Messaging

N-Tron provides the convenience of CIP™ messaging for device management and monitoring with all of the benefits of N-Tron’s robust line of fully managed Hardened Industrial Switches. EtherNet/IP™, better known as the Common Industrial Protocol (CIP), was designed for use in process control and industrial automation applications. CIP was designed to provide consistent device access to eliminate the need for vendor specific software for configuration and monitoring of individual devices.


With embedded support for CIP, N-Tron switches deliver information and configuration access directly to Programmable Logic Controllers (PLC’s) and HMI’s (Human Machine Interface) through standard CIP messaging. Switch status, trending and configuration are easily viewed from a PanelView Plus with screen resolutions of 640 x 480 and higher. In addition to CIP, N-Tron’s robust fully managed feature set includes:

- IGMP Auto Configuration
- VLAN
- QoS
- Trunking
- Port Mirroring
- RSTP
- DHCP Server with Option 82 Relay Agent, Option 61 and IP Fallback
- N-Ring Technology
- N-Link Redundant N-Ring Coupling
- Port Security - MAC Address Based
- LLDP (Link Layer Discovery Protocol)
- Web Browser Management
- SNMP v1, v2, v3
- N-View™ OLE for Process Control Server Software
- Extended Environmental Specifications: up to -40°C to 85°C
- Configurable Alarm Contact and Bi-Color Fault LED


EtherNet/IP with CIP Messaging is a standard feature on on N-Tron’s 700\* and 7000 Series products. CIP tags, sample projects and diagnostic faceplates for FactoryTalk® View ME/SE software (requires RSLogix 5000 version 17 and higher) are provided for quick setup and configuration in RSLogix 5000 environments.

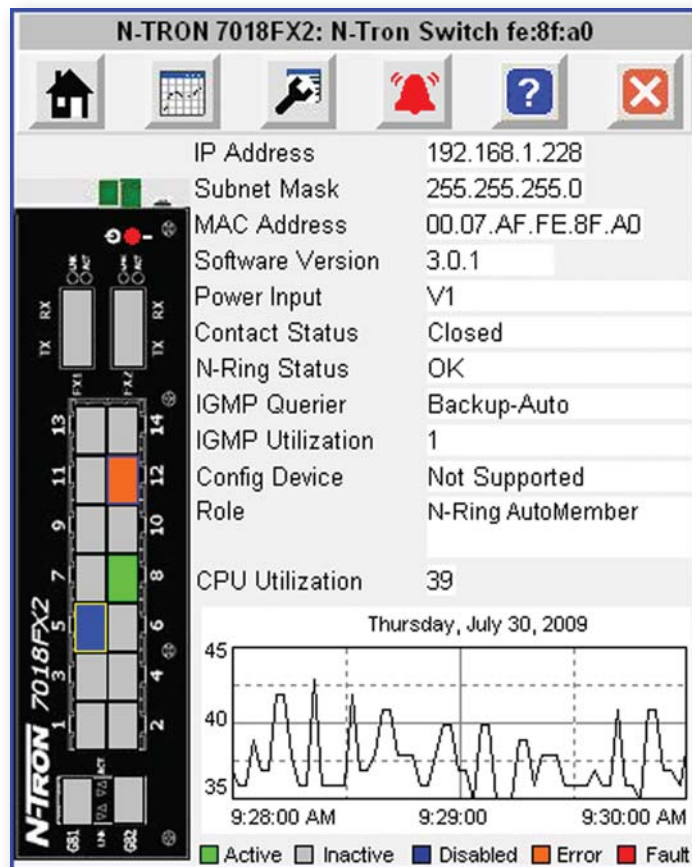

Quickly view switch status using our provide face plates or access tagged data from your ladder logic program.

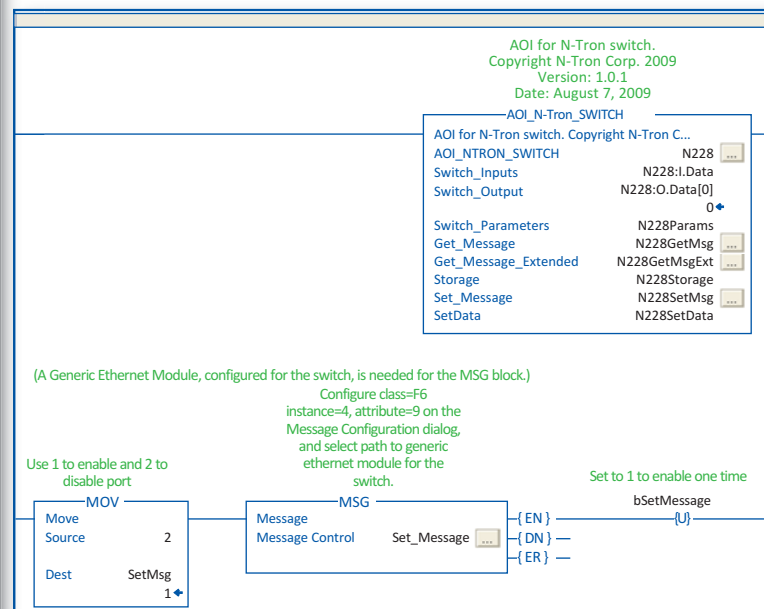

\* Excluding wireless models.

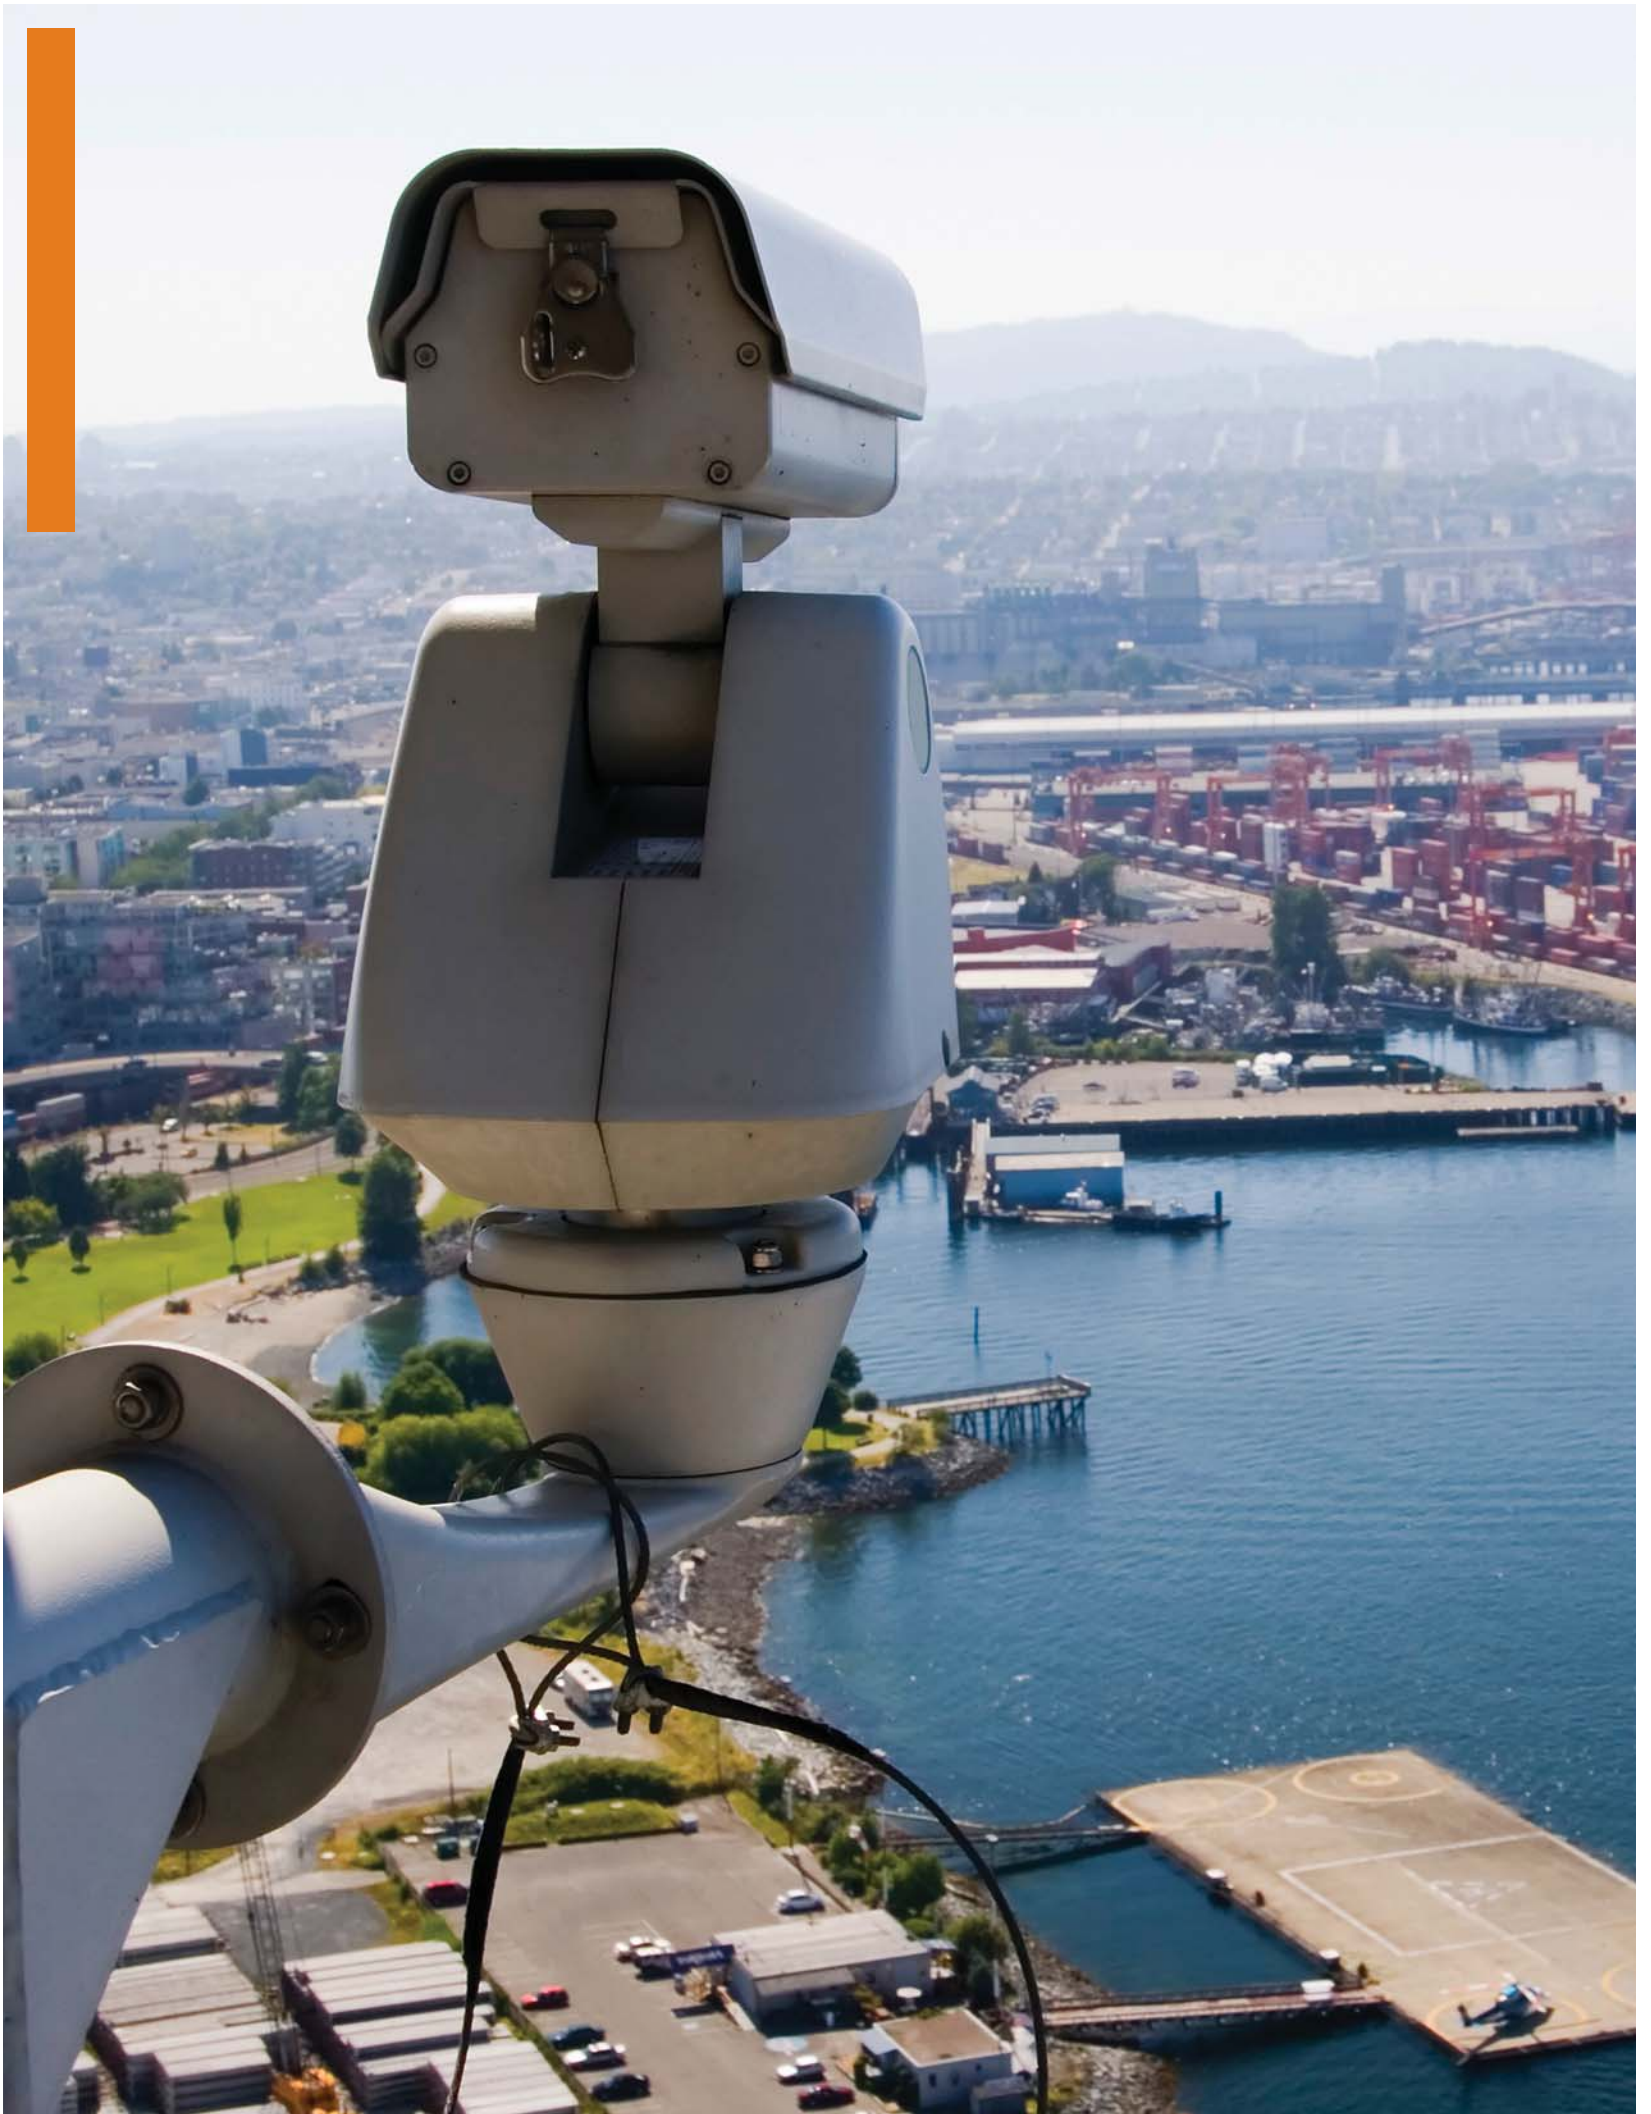

# Fully Managed Gigabit Ethernet for High Traffic Industrial Applications



N-Tron's all-gigabit 7506GX2 is designed to provide maximum performance in harsh, high traffic applications such as security and video surveillance.

The rugged 7506GX2 features four auto-sensing 10/100/1000BaseT(X) Mbps Ethernet ports and two SFP expansion ports for optional Multimode fiber, Singlemode fiber or 1000BaseT copper connections. The 7506GX2 comes standard with fully managed features such as SNMP v3, jumbo frame support, web browser management, EtherNet/IP with CIP messaging, IGMP auto configuration, DSCP, LLDP and DHCP Server with Option 82. An optional SD card may be purchased for saving or restoring the switch configuration.

Gigabit transceivers are available for purchase separately. Factory configured models are also available. Ordering information below.

## 7506GX2

- Four 10/100/1000BaseT(X) RJ-45 Copper Ports
- Two Optional Full Duplex 1000BaseSX/LX Gigabit SFP (Mini-GBIC) Transceivers or Two Optional 1000BaseT Gigabit SFP Transceivers
- Rugged Industrial DIN-Rail Enclosure  
Case Dimensions (3.8"h x 2.0"w x 3.9"d, 1.1 lbs.)
- -40°C to 80°C Operating Temperature
- ESD and Surge Protection Diodes on all Ports  
Auto Sensing 10/100/1000BaseT(X), Duplex and MDIX
- Onboard Temperature Sensor
- Configuration backup via Optional SD card
- Jumbo Frame Support; Port Security - MAC Address Based
- SNMP v1, v2, v3 and Web Browser Management plus  
N-View OPC Monitoring with Fault Status for Ring Managers
- DHCP Server, Option 82 Relay, Option 61, IP Fallback and  
Local IP Static Addressing
- Adv. Features: IGMP Auto Config., VLAN, DSCP, LLDP, QoS, Trunking, Mirroring,  
802.1D RSTP, N-Link Redundant N-Ring Coupling, & EtherNet/IP CIP Messaging
- Ring Manager using N-Tron's N-Ring Technology offers a Standard Healing  
Time of ~30ms
- Redundant Power Inputs 10-49 VDC, 440mA @ 24V

### Ordering Information:

#### **7506GX2**

Four 10/100/1000BaseT(X) Ports and  
Two SFP ports without (optional) Modules

#### **7506GX2-SX**

Four 10/100/1000BaseT(X) Ports and  
Two SFP ports with 2 NTSPFP-SX  
Multimode modules installed

#### **7506GX2-LX**

Four 10/100/1000BaseT(X) Ports and  
Two SFP ports with 2 NTSPFP-LX-10  
Singlemode modules installed

#### **NTSFP-TX**

Optional SFP Transceiver with  
One 1000BaseT GB Copper Port

#### **NTSFP-SX**

Optional SFP Transceiver with  
One 1000BaseSX Multimode GB Fiber  
Optic Port (LC Style Connector)

#### **NTSFP-LX-ZZ**

Optional SFP Transceiver with  
One 1000BaseLX-ZZ Singlemode GB  
Fiber Optic Port (LC Style Connector)

#### **NTCD-128**

Optional SD Card, Configuration Device

 N-Tron 7000 Series  
made in the USA.

Ordering Key: MM = multimode fiber, SM = singlemode fiber, where "E" = singlemode fiber,  
"ZZ" = 10, 40, or 80 for 10km, 40km, or 80km Gigabit Singlemode fiber length.

# Fully Managed GbE Modular Switch with RSTP and N-Ring Capability

The fully managed N-Tron 9000 Series Gigabit Ethernet capable industrial Ethernet switch offers superior performance and ease of use for Ethernet enabled industrial and security equipment.

With management features such as IGMP Snooping, VLAN, QoS, Port Mirroring, Port Trunking and 802.1w Rapid Spanning Tree Protocol (RSTP), the 9000 Series is designed to increase efficiency and network performance.

Advanced Management features can be configured using a Web Browser, SNMP, Telnet, or COM port.

The 9000 Series is an industrial four slot modular switch, offering two optional Gigabit ports, up to 16 fiber optic ports, and up to 24 RJ-45 copper ports.

The Rapid Spanning Tree Protocol function allows the switch to be configured in a Ring or Mesh topology and provides support for redundant path communications with rapid healing.

Used as a fiber optic Ring Manager, the 9000 Series switch, with N-Tron's N-Ring technology, offers expanded ring size capacity, detailed fault diagnostics and a standard healing time of ~30ms.

The N-Tron N-Ring Manager sends out "self health" packets and "ring control" packets periodically around the fiber optic ring, for managing, detecting and restoring ring breaks. If these packets are successfully routed around the ring within the allocated time window, the ring is intact. However, if the ring is broken and the Ring Manager stops receiving these health check packets, it converts the ring to a fiber optic backbone configuration within ~30ms.

When using all N-Tron fully managed switches in the ring, a detailed ring map and fault location chart will be provided on the Ring Manager's web browser to identify the health status of the ring.

N-Tron's 9000 Series switches meet the following regulatory approvals:

- UL 1604 C Listed (U.S. & Canada) Class I, Div. 2 Hazardous Location
- CE: EN61000-6-2,4, EN55011, EN61000-4-2,3,4,5,6
- ABS Type Approval (Maritime Applications)
- IEEE 1613 Compliance (Electric Utility Substation)
- FCC Part 15 Class A
- NEMA TS1/TS2 Compliance (Traffic Control)



## 9000BP

- 9000BP High Speed Backplane with Four Slot DIN-Rail Modular Switch Chassis
- 9000CPU\* Module
- 9002CPU\* Module with Two 1000BaseSX/LX Gigabit SFP Transceivers See ordering information below for Multimode and Singlemode options
- Fully Managed Features: IGMP Auto Configuration, VLAN, QoS, Trunking, Port Mirroring and 802.1w Rapid Spanning Tree (RSTP)
- Full SNMP, Web Browsing, N-View Switch Monitoring
- 9000 Series can be configured as N-Tron's N-Ring Manager to Create a Fiber Optic Ring with ~30ms Standard Healing
- Case Dimensions (5.2" h x 9.0" w x 5.6" d, 5 lbs. fully populated)
- -20°C to 70°C Operating Temperature  
-40°C to 85°C Storage Temperature
- >1 Million Hours MTBF
- Redundant Power Inputs: 10-30 VDC, 1.1 A @ 24V with 9000BP & 9002CPU  
N-Tron NTPS-24-5 Power Supply recommended
- Order Backplane & Chassis Part #9000BP  
\*Either 9000CPU or 9002CPU is required to be installed in CPU slot of 9000BP
- Order CPU Part #9000CPU (for no Gigabit)  
Order Gigabit CPU Part #9002CPU-SX (for MM) or #9002CPU-LX-ZZ (for SM)



N-Tron 9000 Series made in the USA.



## 9006TX

- Six Port 10/100BaseTX Copper Module
- Slide in module for 9000BP Backplane & Four Slot Chassis
- Auto Sensing Full/Half Duplex, Speed and MDIX
- Full IEEE 802.3 and 1613 Compliance
- Full Wire Speed Communications
- Hardened ESD Port Protection
- Module Weight 0.5 lbs
- -20°C to 70°C Operating Temperature
- -40°C to 85°C Storage Temperature
- Redundant Power Inputs 10-30 VDC, 0.35A @ 24V
- >1 Million Hours MTBF
- Order Part #9006TX

## 9002FX

- Two Port 100BaseFX Module ST or SC Full Duplex
- Slide in module for 9000BP Backplane & Four Slot Chassis
- Multimode or Singlemode Fiber Available
- Full IEEE 802.3 and 1613 Compliance
- Full Wire Speed Communications
- Hardened ESD Port Protection
- Module Weight 0.5 lbs
- -20°C to 70°C Operating Temperature
- -40°C to 85°C Storage Temperature
- Redundant Power Inputs 10-30 VDC, 0.15A @ 24V
- >1 Million Hours MTBF
- Order MM Part #9002FX-XX  
Order SM Part #9002FXE-XX-YY

## 9004FX

- Four Port 100BaseFX Module ST or SC Full Duplex
- Slide in module for 9000BP Backplane & Four Slot Chassis
- Multimode or Singlemode Fiber Available
- Full IEEE 802.3 and 1613 Compliance
- Full Wire Speed Communications
- Hardened ESD Port Protection
- Module Weight 0.6 lbs
- -20°C to 70°C Operating Temperature
- -40°C to 85°C Storage Temperature
- Redundant Power Inputs 10-30 VDC, 0.25A @ 24V
- >1 Million Hours MTBF
- Order MM Part #9004FX-XX  
Order SM Part #9004FXE-XX-YY

Ordering Key: MM = multimode fiber, SM = singlemode fiber, "E" = singlemode fiber, "XX" = ST or SC for fiber style connector, "YY" = 15, 40, or 80 for 15km, 40km, or 80km SM fiber length, "ZZ" = 10, 40, 80, for 10km, 40km, or 80km SM Gigabit fiber length.

# N-Tron's Line of Serial Communications Devices for Industrial Environments

The N-Tron family of serial devices includes an industrial remote access server, serial-to-fiber converter, an Isolator, a Repeater and Serial-to-Ethernet converters. This wide array of serial products provide connectivity options for legacy serial equipment.

The Modbus gateway completes this family of products, providing the capability to translate Modbus/TCP to Modbus ASCII/RTU. These devices are DIN-Rail mountable, compact in size, have a high MTBF and like all N-Tron products, are designed to provide maximum network availability in rugged industrial environments.



## 102RAS

- One RJ-45 10/100BaseTX Copper Port
- One RJ-11 WAN/Phone Line Port with V92/56K Modem
- Provides Connectivity to Industrial LAN via Modem
- Provides Multiple Security and Callback Options
- -20°C to 70°C Operating Temperature
- Redundant Power Inputs 10-30 VDC, 221 mA @ 24V
- Fast Data Transfer Rates
- Web Browser Configuration
- Hardened ESD Protection Diodes on RJ-45 Port
- Surge Protection Diodes on Power Inputs
- DIN-Rail Case Dimensions (3.4" h x 1.5" w x 3.6" d, 0.70 lbs.)
- Order Part #102RAS

## ESERV-11T/12T

- Industrial Ethernet to Serial Server
- Up to Two Active Serial Ports
- One Ethernet Port Available w/ 10/100BaseTX or 100BaseFX-ST
- Connects RS-232, RS-422, or RS-485 Devices to LAN or WAN
- Wide Operating Temperature -34°C to 80°C
- 10 to 58VDC Input Power Range
- Supports Data Rates up to 230.4 Kbps
- Simple Configuration with Built-in Web Server
- Heartbeat Connection with Auto Detection and Reconnect
- DIN-Rail Case Dimensions (4.7" h x 1.2" w x 3.2" d, 0.33 lbs.)
- Order #ESERV-11T (1 Serial Port) or #ESERV-11-ST\* (1 Serial Port)
- Order #ESERV-12T (2 Serial Ports) or #ESERV-12-ST\* (2 Serial Ports)

## ESERV-M12T

- Industrial Modbus Ethernet to Serial Gateway
- Two Active Serial Ports via TB Connectors
- One Ethernet Port Available w/ 10/100BaseTX or 100BaseFX-ST
- Connects Modbus Serial Devices to Modbus TCP, LAN or WAN
- Wide Operating Temperature -34°C to 80°C
- 10 to 58VDC Input Power Range
- Supports Data Rates up to 230.4 Kbps
- Simple Configuration with Built-in Web Server
- Heartbeat Connection with Auto Detection and Reconnect
- Modbus Messaging Priority Control - Real Time Messaging
- DIN-Rail Case Dimensions (4.7" h x 1.2" w x 3.2" d, 0.33 lbs.)
- Order Part #ESERV-M12T or Order Part #ESERV-M12-ST\*





## SER-485-IC


- Industrial Isolated Converter
- RS-232 DB9 Female Serial Connector
- RS-422/485 Five Position Terminal Block
- Modbus, ASCII, RTU Compatible
- Wide Operating Temperature -40°C to 80°C
- 10 to 48VDC Input Power Range
- Supports Data Rates up to 115.2 Kbps
- 3-Way 2000V Optical Isolation
- Built-in Switchable Termination and Bias
- 12 Position DIP Switch Configuration
- DIN-Rail Case Dimensions (4.9" h x 1.3" w x 4.5" d, 0.45 lbs.)
- Order Part #SER-485-IC

## SER-485-IR


- Industrial Isolated Repeater
- Two RS-232/485 Five Position Terminal Blocks
- Extends Signal up to 4,000 feet (1200 Meters)
- Modbus, ASCII, RTU Compatible
- Wide Operating Temperature -40°C to 80°C
- 10 to 48VDC Input Power Range
- Supports Data Rates up to 115.2 Kbps
- 3-Way 2000V Optical Isolation
- Built-in Switchable Termination and Bias
- 12 Position DIP Switch Configuration
- DIN-Rail Case Dimensions (4.9" h x 1.3" w x 4.5" d, 0.49 lbs.)
- Order Part #SER-485-IR

## SER-485-FXC

- Industrial Serial to Multimode Fiber Converter
- RS-232/485 Five Position Terminal Block
- One 100BaseFX Multimode ST style Fiber Port
- Modbus, ASCII, RTU Compatible
- Wide Operating Temperature -40°C to 80°C
- 10 to 48VDC Input Power Range
- Supports Data Rates up to 115.2 Kbps
- 3-Way 2000V Optical Isolation
- Built-in Switchable Termination and Bias
- 12 Position DIP Switch Configuration
- DIN-Rail Case Dimensions (4.9" h x 1.3" w x 4.5" d, 0.44 lbs.)
- Order Part #SER-485-FXC

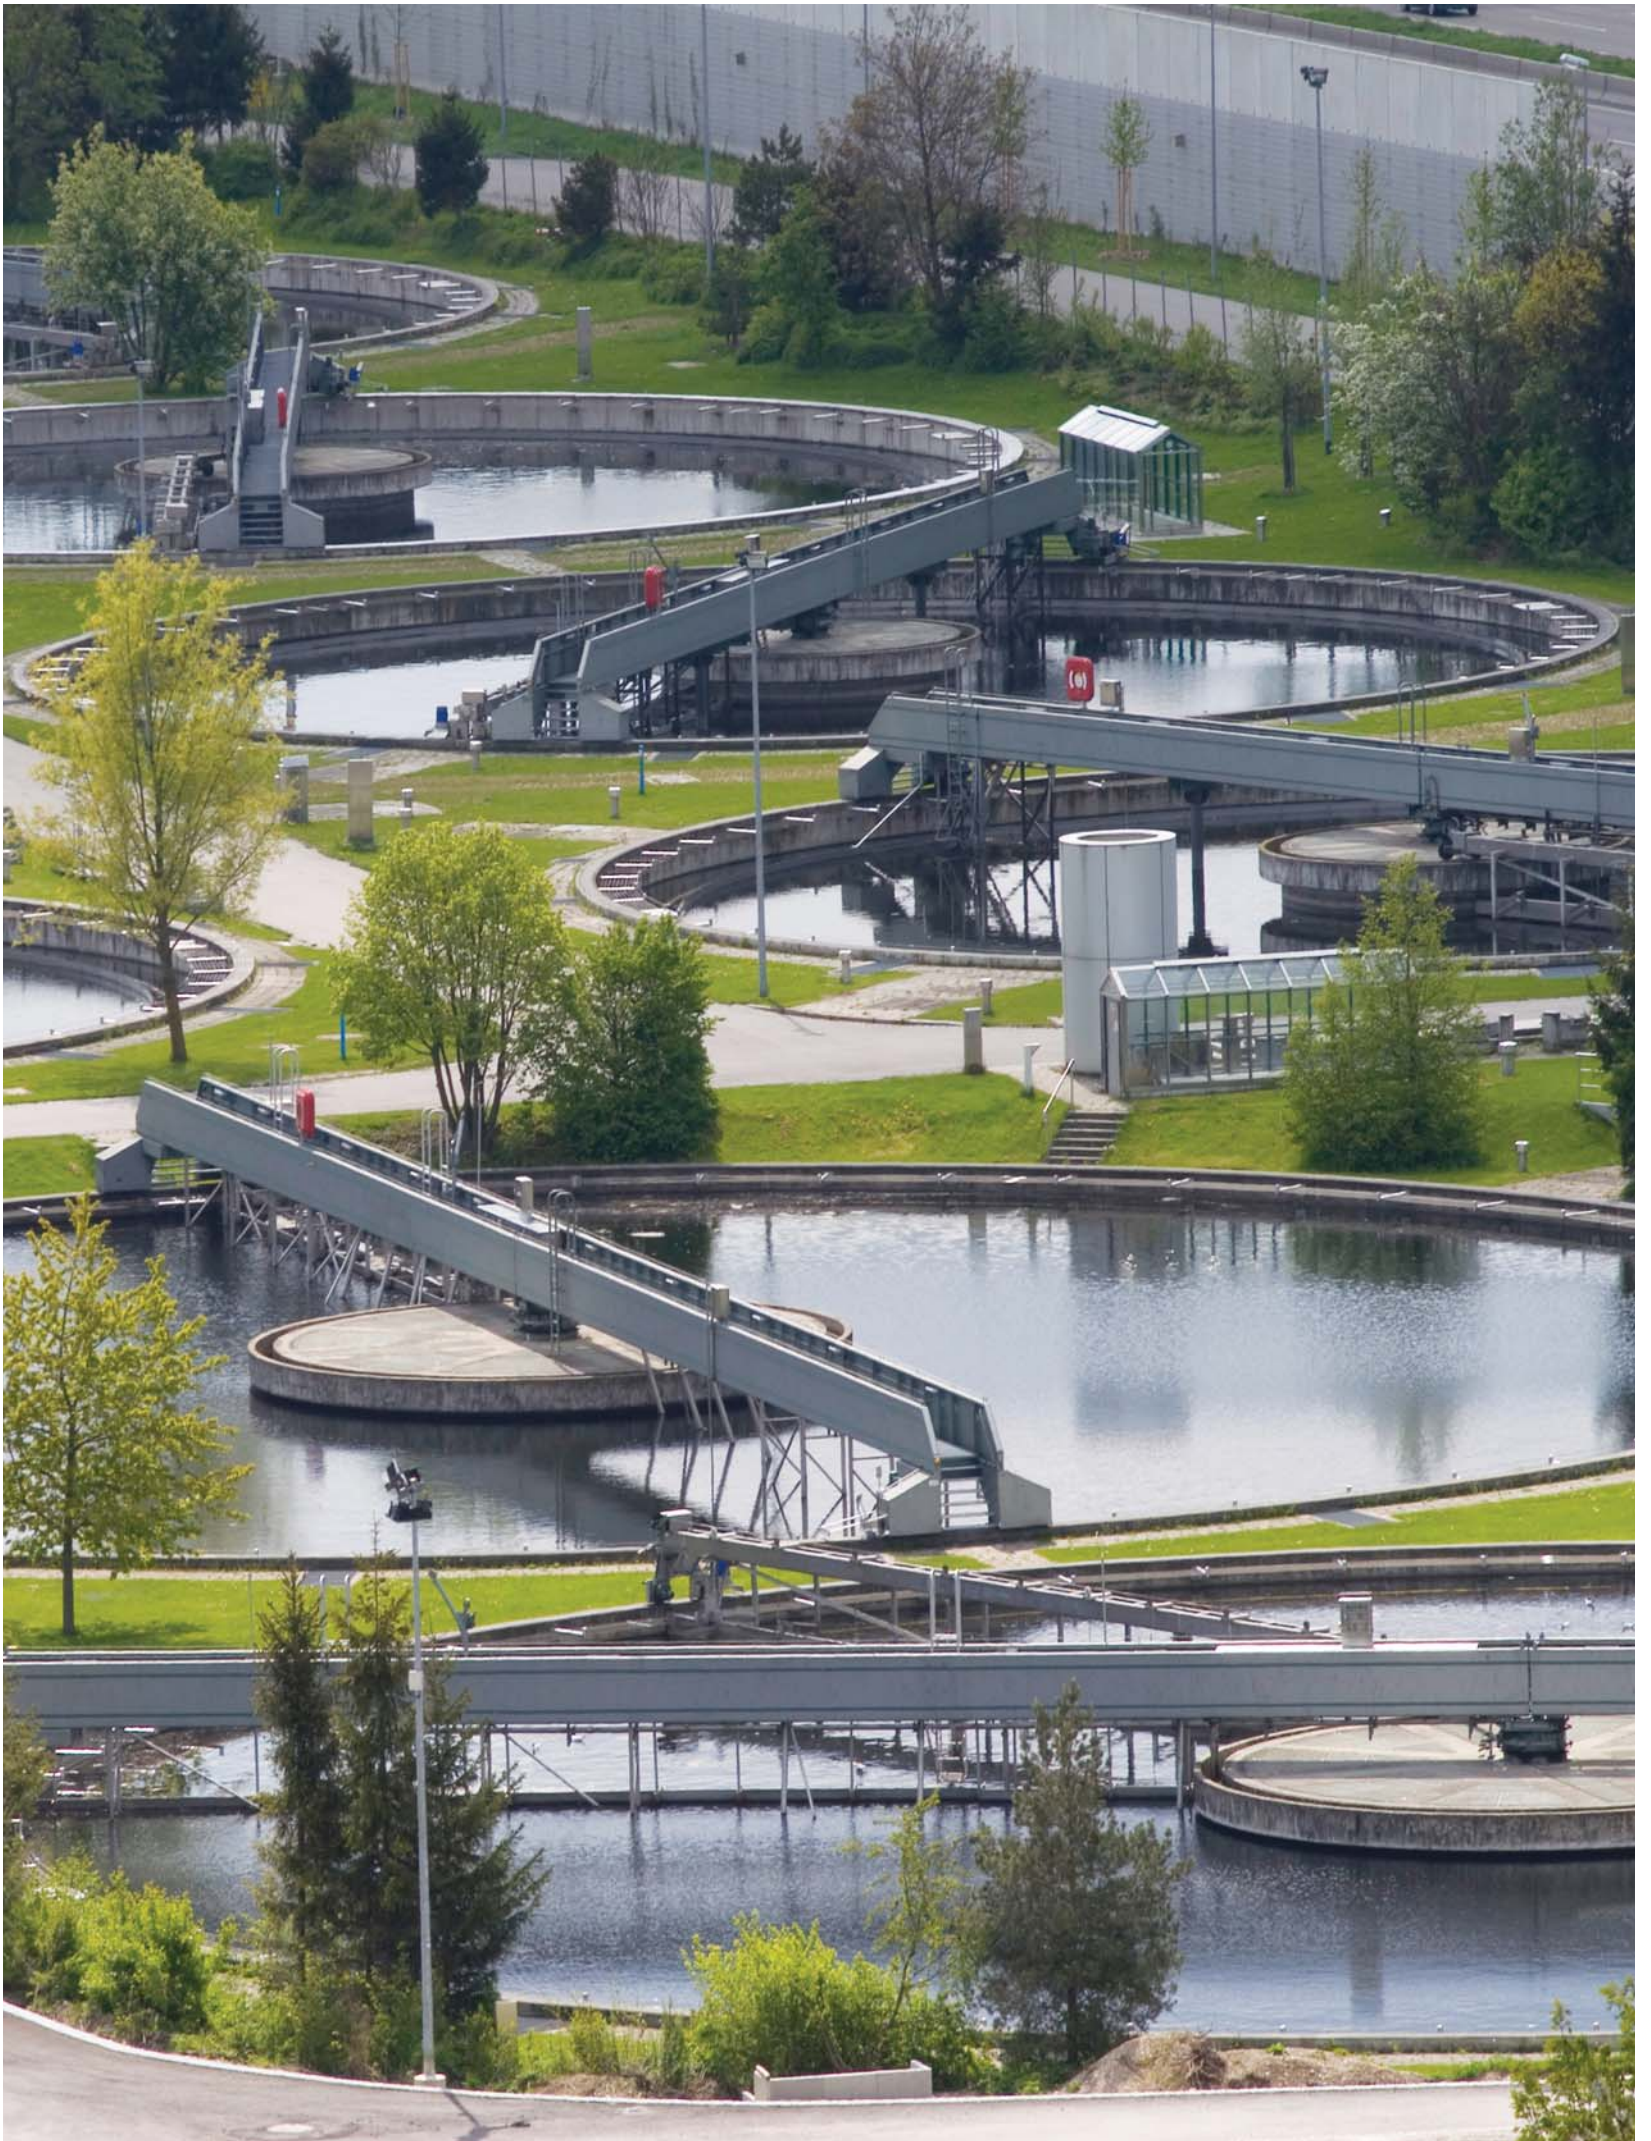


# The Star Topology

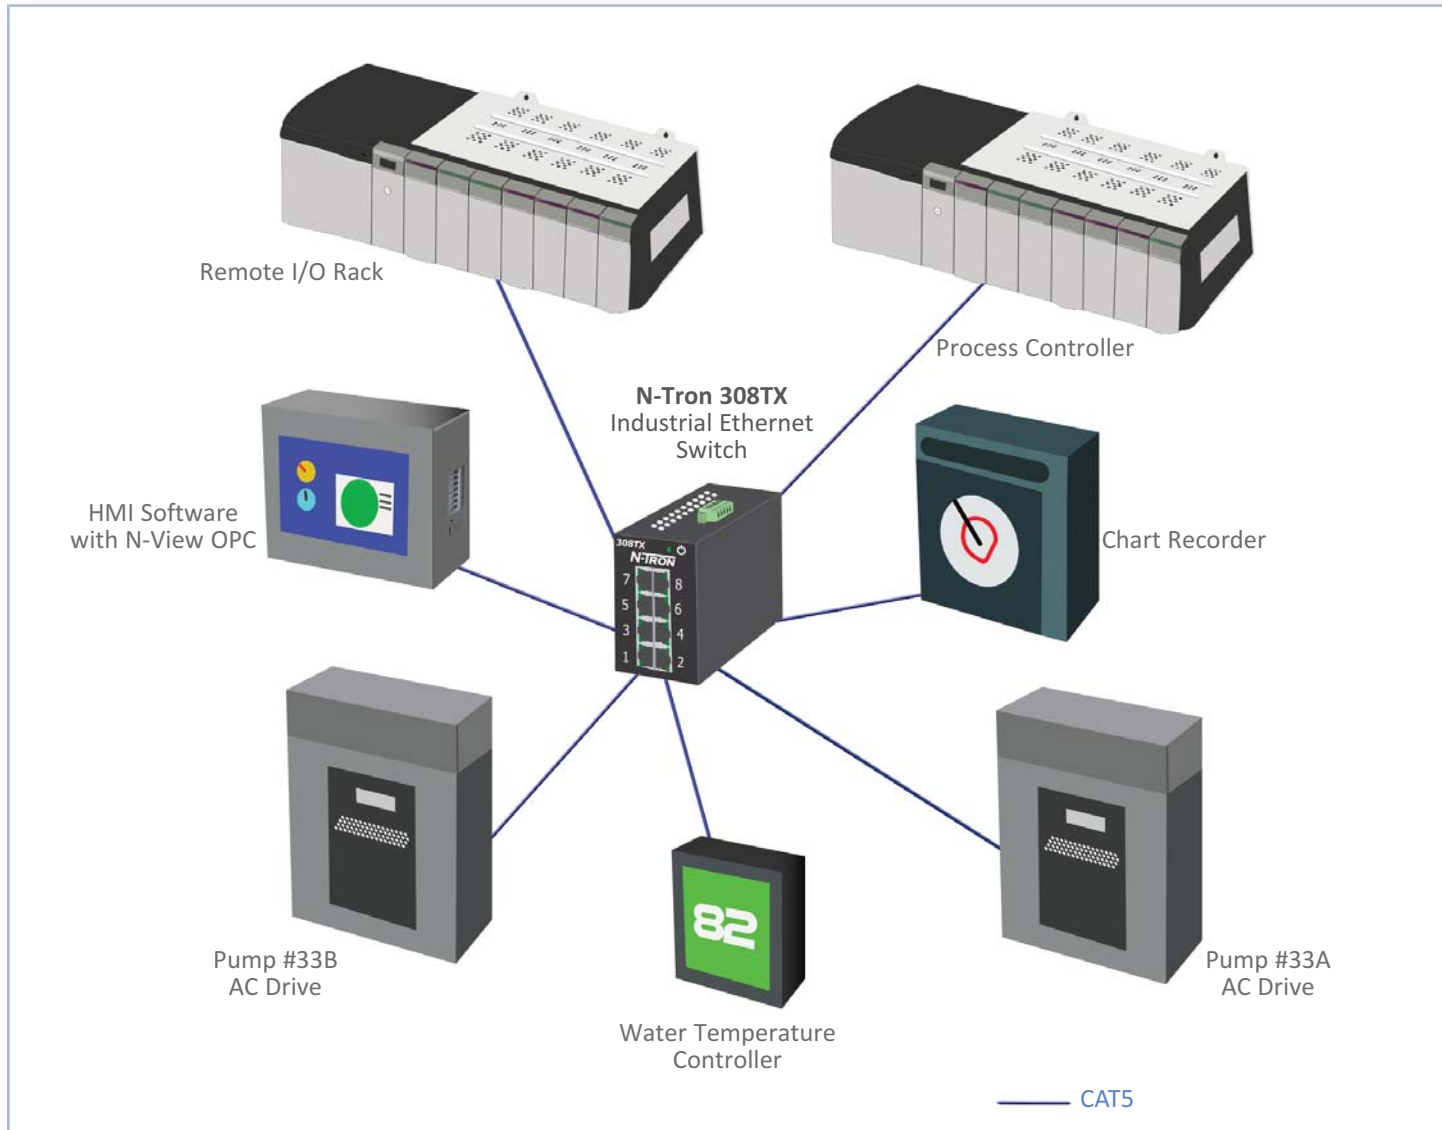

**The star topology** is the most efficient network design for data acquisition and control systems. Because the MTBF of an N-Tron industrial switch is in excess of 1 million hours, the likelihood of a switch or media failure is remote. N-Tron switches offer dual power supply inputs to eliminate the possibility of a single power supply failure bringing the network down. The star topology also allows for the utilization of lower cost Layer 2 switches and provides an order of magnitude speed improvement over ring topology.

The star topology can easily be implemented with fiber and/or copper. This network is simple to maintain and troubleshoot. The N-View option will add remote monitoring capability to your control system network. The N-View OPC Server, when combined with any standard OPC client HMI software package, will provide full network monitoring and alarming capability. N-View is available on N-Tron's 300, 500, 700, 7000 and 9000 Series switches.


# The Tree Topology

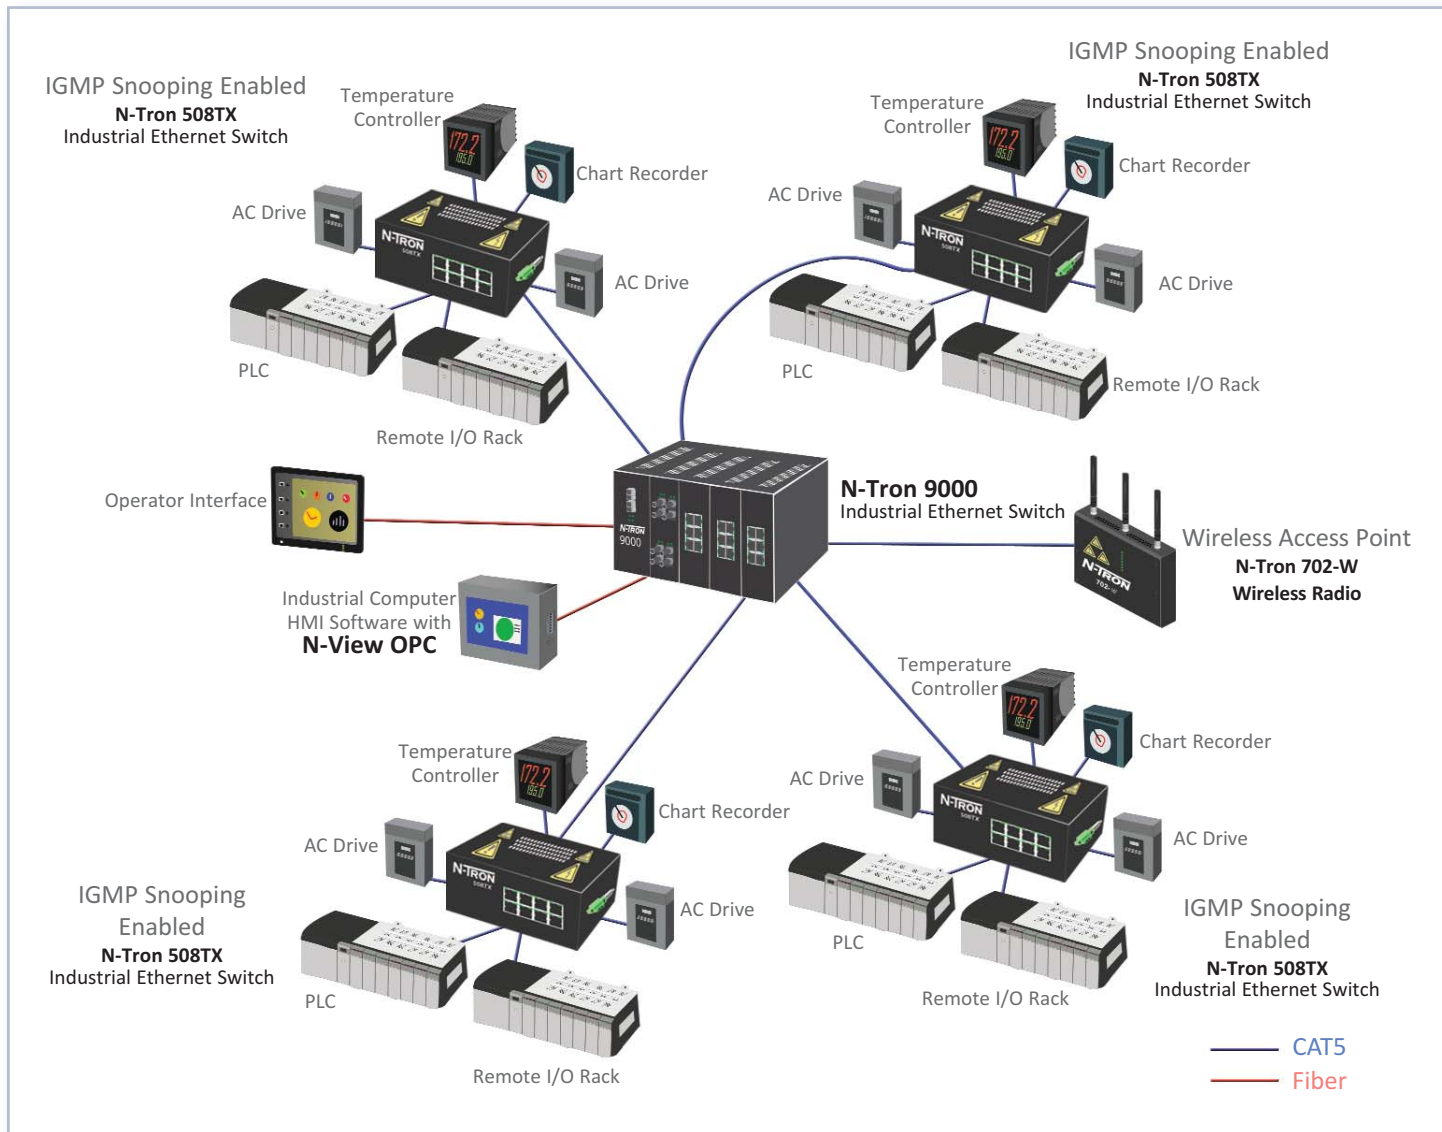

**The tree topology** uses a combination of several switches to form a single network. This topology provides the most efficient method of interconnecting multiple control systems. The above diagram highlights the Internet Group Management Protocol (IGMP). IGMP is frequently used by control systems to route multicast packets for communication between control devices.

The routing of the IGMP multicast packets is essential to prevent multicast traffic from adversely affecting upstream network devices such as routers, wireless access points, RS-232/485 to Ethernet converters, or any other network device which can not transmit or process packets at full wire speed. This feature allows IGMP capable switches to forward multicast packets based on learned group addresses. Each switch will transmit copies of a specific multicast message only to ports that have joined that multicast group.


# The Wireless & PoE Bridge Topology

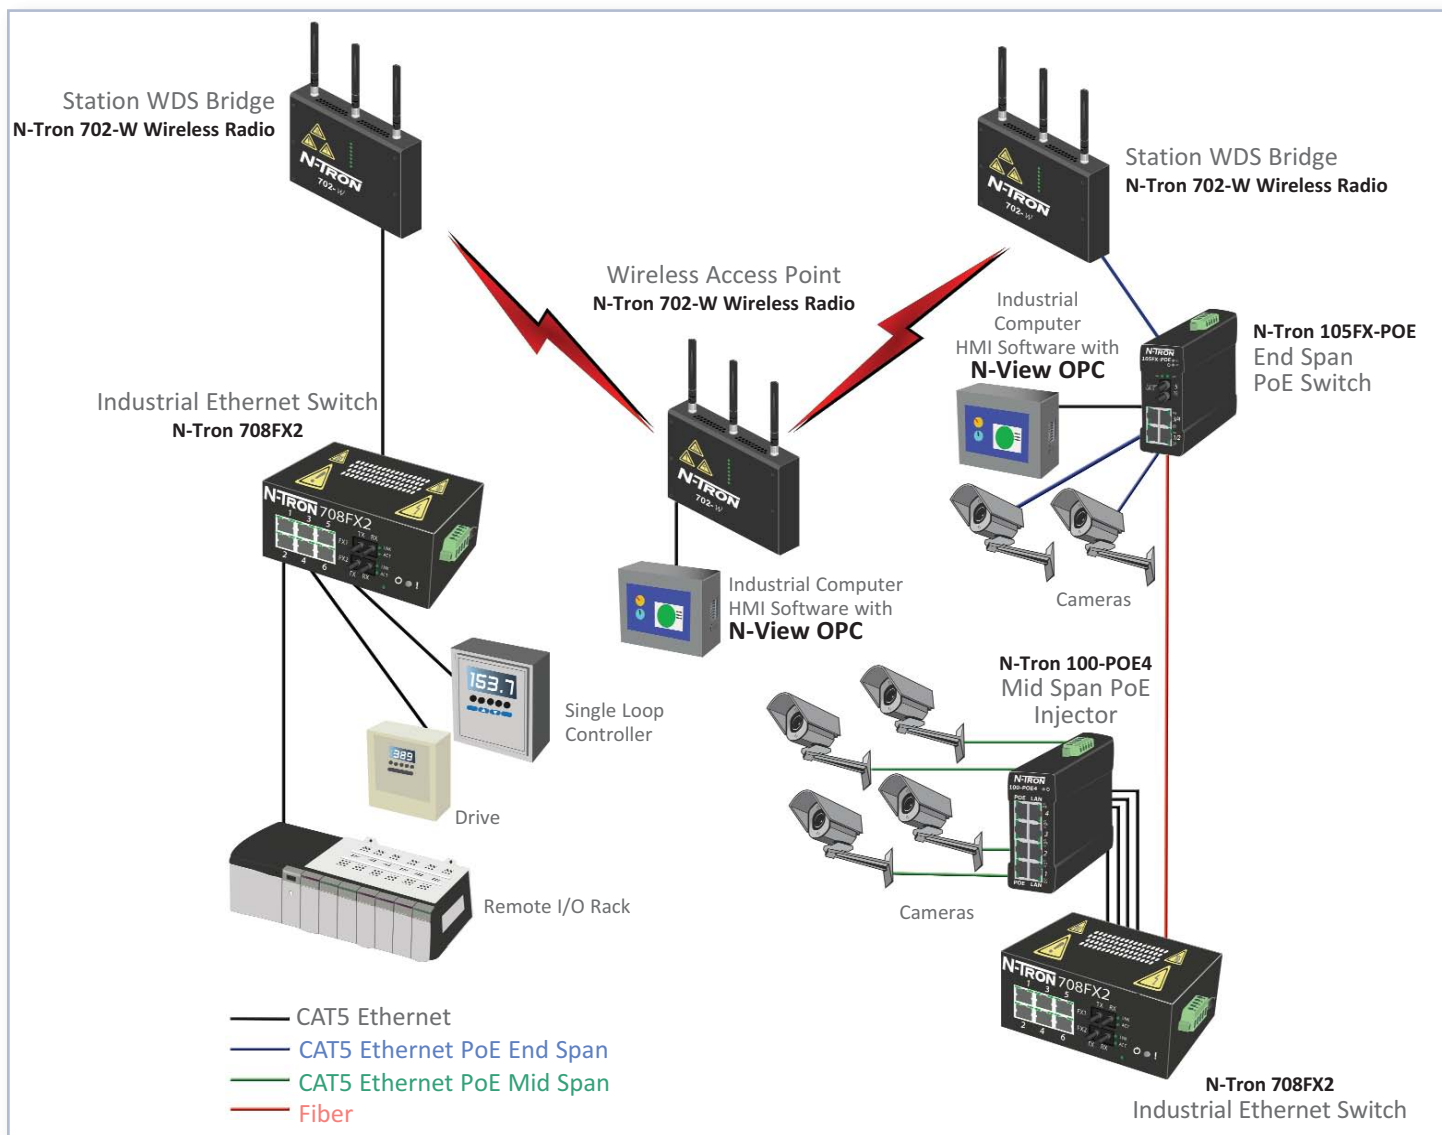

**The wireless and PoE bridge topology** uses N-Tron's 702-W high performance hardened wireless technology. The 702-W can be configured to provide a high-speed wireless infrastructure for process control, security and many other applications requiring IEEE 802.11a, b, g, or n connectivity. The need to gather data from and provide data to equipment and employees moving around a facility is one of the primary applications for these devices. Wireless communication may be used to link remote locations that require monitoring or data services without the need to install costly Category 5/6 cable or Fiber optic cable.

The 702 Series, available in both indoor and outdoor models, can be setup as a bridge or router in access point or station configurations. The 702M12-W utilizes an IP67 water tight enclosure. Both models can be powered using PoE or redundant (20VDC to 49VDC) power supplies. N-Tron antennas, cable assemblies and mounting options can be found on our accessories page.


# Media Redundant N-Ring Topology

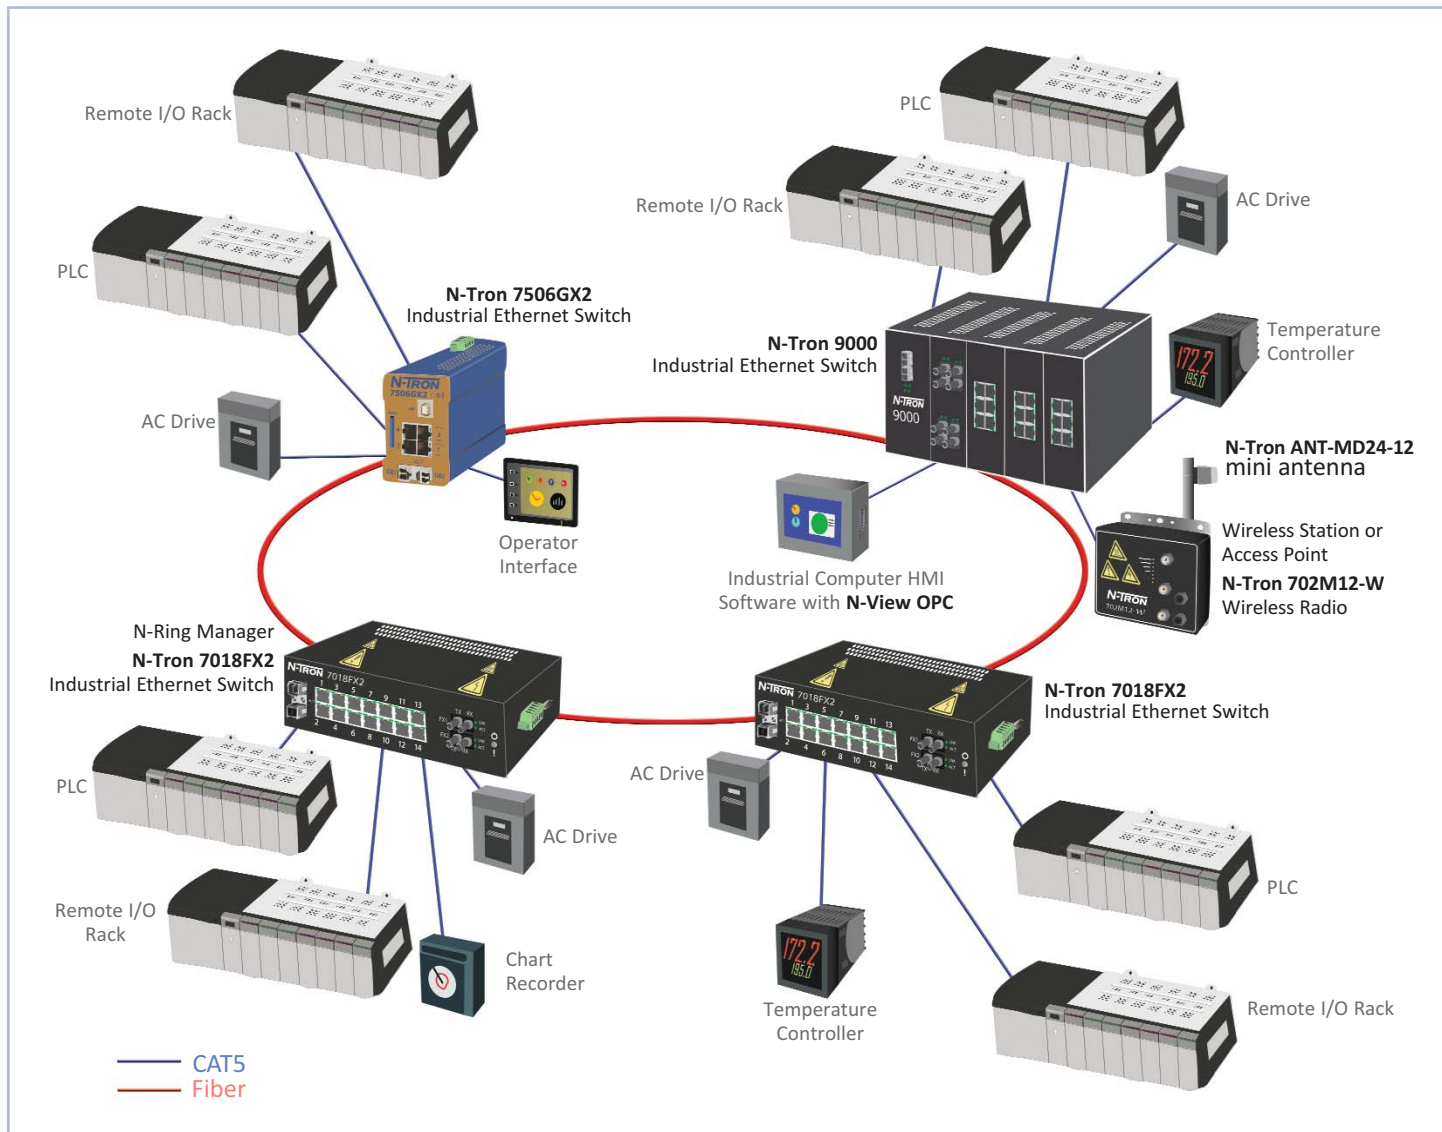

**The media redundant N-Ring topology** can be greatly enhanced by using products with N-Tron’s N-Ring technology. The topology above features 7000 and 9000 Series switches in a gigabit ring. In this case, one of the 7018FX2 switches operates as the Ring Manager. However, any of the N-Tron switches on the ring could perform the same functions. The N-Ring Manager sends out “health” and “ring control” packets periodically around the fiber ring. If these packets are successfully routed within the allocated time, the ring is declared to be intact. However, if a packet fails to arrive as expected, the Ring Manager assumes a break has occurred and traffic is routed around the break within ~30ms.

When N-Tron’s fully managed switches are included, the Ring Manager’s web browser interface is available to check ring status. The web interface provides a detailed real-time ring map and fault location chart to identify activity and error conditions. For similar 100-based topologies, N-Tron’s 700 Series switches can be used in the same capacity.

# N-Ring with N-Link Topology

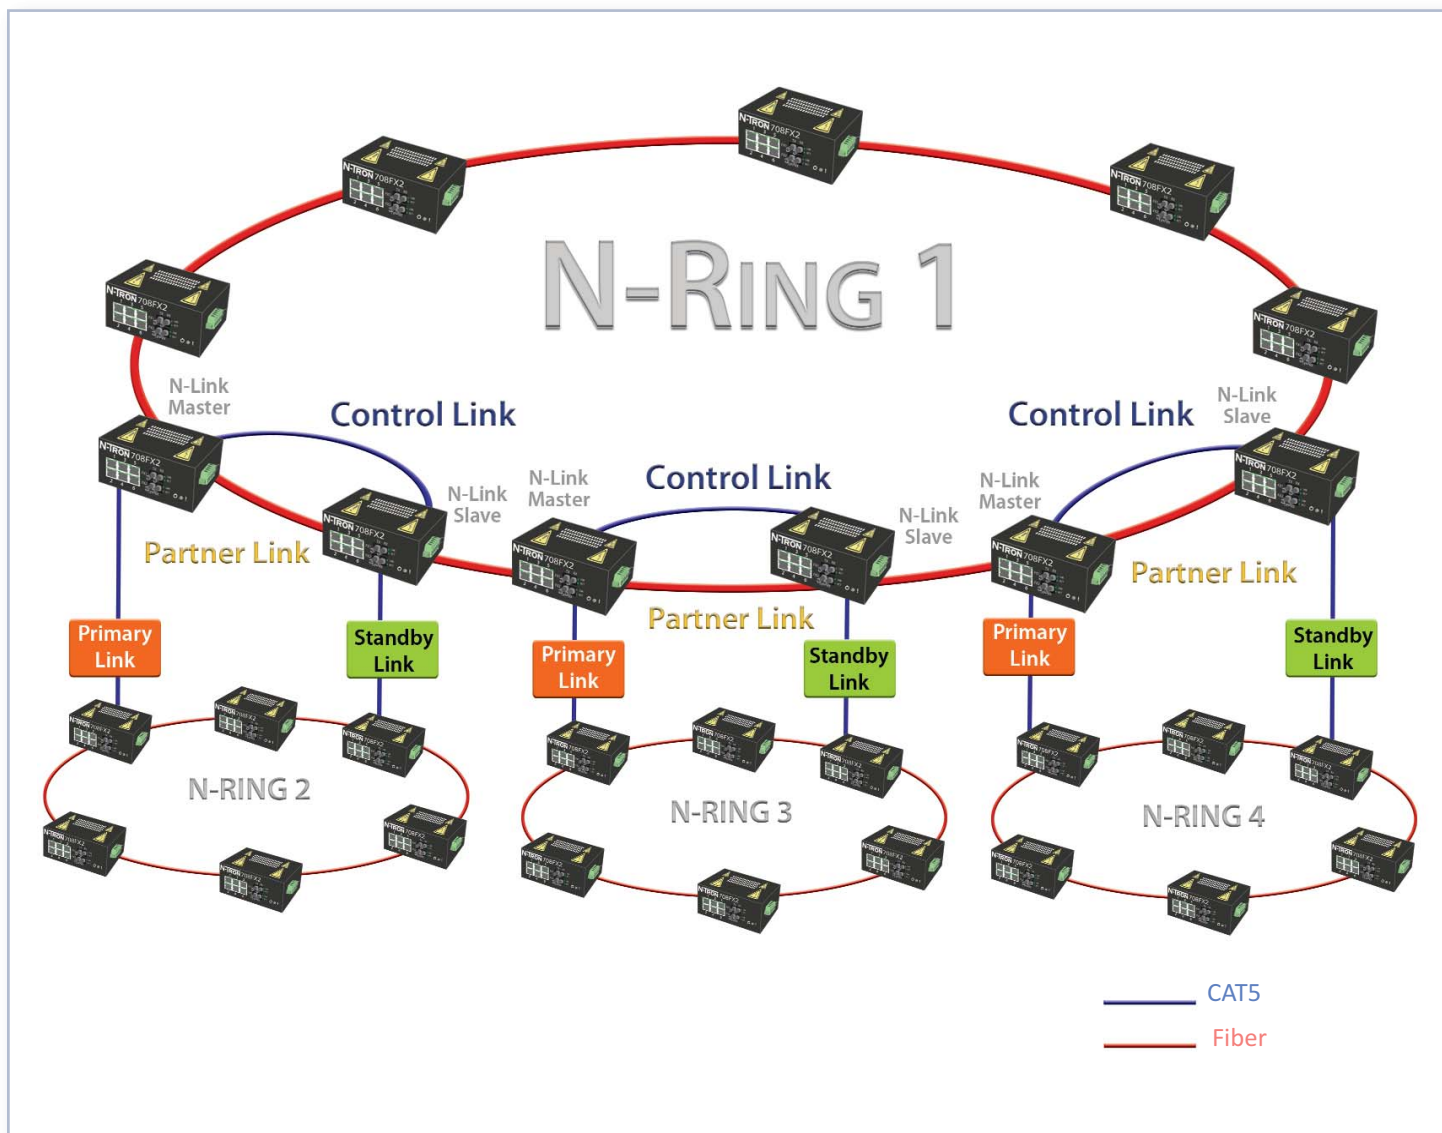


**The N-Link topology** allows the connection of two or more N-Rings. This arrangement is used in hardware redundancy designs and to run interconnected N-Rings for a distributed N-Ring topology. The N-Link connections form redundant media links between two N-Rings and will monitor them to determine if the links are intact. If a break in the primary link occurs, traffic will be rerouted through the standby link within 30ms. A single N-Ring can support up to 126 N-Linked N-Rings.


The N-Link topology is ideal for subway, light rail, pipeline substation, utility substation and other applications that require distributed high-speed ring topology. N-Link is available on N-Tron's 700, 7010, 7018, 7026 and 7506 Series.

# N-Tron Peripherals and Accessories



## Cables

	2ZR6AA-X	Multimode Duplex Fiber Optic Cable, 62.5/125um, 1310nm, ST-ST Connectors
	2ZR6AB-X	Multimode Duplex Fiber Optic Cable, 62.5/125um, 1310nm, ST-SC Connectors
	2ZR6AC-X	Multimode Duplex Fiber Optic Cable, 62.5/125um, 850nm, ST-LC Connectors
	2ZR6BB-X	Multimode Duplex Fiber Optic Cable, 62.5/125um, 1310nm, SC-SC Connectors
	2ZR6BC-X	Multimode Duplex Fiber Optic Cable, 62.5/125um, 850nm, SC-LC Connectors
	2ZR6CC-X	Multimode Duplex Fiber Optic Cable, 62.5/125um, 850nm, LC-LC Connectors
	2ZR8AA-X	Singlemode Duplex Fiber Optic Cable, 8.3/125um, 1310nm, ST-ST Connectors
	2ZR8AB-X	Singlemode Duplex Fiber Optic Cable, 8.3/125um, 1310nm, ST-SC Connectors
	2ZR8AC-X	Singlemode Duplex Fiber Optic Cable, 8.3/125um, 1310nm, ST-LC Connectors
	2ZR8BB-X	Singlemode Duplex Fiber Optic Cable, 8.3/125um, 1310nm, SC-SC Connectors
	2ZR8BC-X	Singlemode Duplex Fiber Optic Cable, 8.3/125um, 1310nm, SC-LC Connectors
	2ZR6CC-X	Singlemode Duplex Fiber Optic Cable, 8.3/125um, 1310nm, LC-LC Connectors
	06AR6-X	Multimode, 6 Strand Fiber Optic Cable, 62.5/125um, 1310nm, Armored ST-ST Connectors

	ANT-CAB-195-RPSMA-RPSMA-X	702-W Antenna Bulkhead Extension Cable Set; Each Cable includes 1 Straight RP-SMA Bulkhead Jack and 1 90° RP-SMA Plug (package of 3)
	ANT-CAB-400-N-X	Low Loss CA-400 Coaxial Cable with 2 N Male Connectors for ANT-LA6-NFF Lightning Arrestor
	ANT-CAB-400-N-RPSMA-X	Low Loss CA-400 Coaxial Cable with 1 RP-SMA Connector & 1 N Male Connector for N-Tron's 702-W
	ANT-CAB-400-N-RPTNC-X	Low Loss CA-400 Coaxial Cable with 1 RP-TNC Connector & 1 N Male Connector for N-Tron's 702M12-W
	CAT5E-X	Cat5e Shielded Twisted Pair Cable, RJ-45 Connectors with Strain Relief Boots, Shielded
	CAT5E-M12-M12-X	Cat5e Shielded Twisted Pair with Straight M12 to Straight M12 Connectors, Shielded
	CAT5E-M12-RJ45-X	Cat5e Shielded Twisted Pair with Straight M12 to RJ-45 Connectors, Shielded
	CAT5E-M12-X	Cat5e Shielded Twisted Pair with Straight M12 Connector to Bare End, Shielded
	CAT5E-RM12-M12-X	Cat5e Shielded Twisted Pair with 90° M12 to Straight M12 Connectors, Shielded
	CAT5E-RM12-RM12-X	Cat5e Shielded Twisted Pair with 90° M12 to 90° M12 Connectors, Shielded
	CAT5E-RM12-RJ45-X	Cat5e Shielded Twisted Pair with 90° M12 to RJ-45 Connectors, Shielded
	CAT5E-RM12-X	Cat5e Shielded Twisted Pair with 90° M12 Connector to Bare End, Shielded
	SERIAL-DB9-M12	Serial Cable with DB-9 to Straight M12 Connectors, 5ft in length, Shielded
	SERIAL-DB9-RM12	Serial Cable with DB-9 to 90° M12 Connectors, 5ft in length, Shielded

Cables Ordering Key: "X" = Length in feet



## Power Supplies & Power Cords



NTPS-24-1.3	DIN-Rail Power Supply for N-Tron's 100, 300, 500*, 700, 1000, & 7000 Series Products. 1.3 Amp @ 24 VDC (*When operating two or more 524TX or 526FX2 devices, use NTPS-24-3)
NTPS-24-2.5	DIN-Rail Power Supply 2.5 Amp @ 24 VDC, NEMA TS2 Certified
NTPS-24-3	DIN-Rail Power Supply for N-Tron's Products, especially suited for 524TX & 526FX2. 3.0 Amp @ 24 VDC
NTPS-24-5	DIN-Rail Power Supply for N-Tron's Products, especially suited for 9000 Series. 5.0 Amp @ 24 VDC
NTPS-24-TT-XXX	Table Top Power Supply for N-Tron's 100, 300, 500, & 700 Series Products. Amperage varies per Series, Pre-Terminated, ~12ft. Not for use with M12, PoE, HV, 524TX, or 526FX2 models.
NTPS-24-WA-XXX	Wall Adaptor Power Supply for N-Tron's 100, 300, 500, & 700 Series Products. Amperage varies per Series, Pre-Terminated, ~6ft. Not for use with M12, PoE, HV, 524TX, or 526FX2 models.
NTPS-48-2	DIN-Rail Power Supply for N-Tron's 100 Series PoE or High Voltage Products. 2.0 Amp @ 48 VDC
NTPS-48-5	DIN-Rail Power Supply for N-Tron's 100 Series PoE or High Voltage Products. 5.0 Amp @ 48 VDC
NTSA-CAT5e	In-Line, DIN-Rail Cat5e Surge Arrester effective for all wiring schemes
NTPC-AC-US	US Industrial High-Temp Power Cord for 7026TX-AC Ethernet Switch (Cord Length: 7 Ft., Gauge/Conductor: 18/3, Temp. Rating: 105°C, Plug: NEMA 5-15, Voltage Rating: 300V)
PWR-M12-A-X	Power Cable, Straight M12 A-coded Female Connector to Bare End, Shielded
PWR-RM12-A-X	Power Cable, 90° M12 A-coded Female Connector to Bare End, Shielded

Power Supplies Ordering Key: "XXX" = N-Tron series # receiving power

## Configuration and Recovery Devices



NTCD-128	SD Card, Configuration Recovery Device
700-NTCD-M12	Configuration Recovery Device for use with N-Tron's 708M12 Series Switches, Straight M12 A-Coded 4-Pin Male Connector

## Antennas and Wireless Accessories



ANT-LA6-NFF	2-6 GHz, Quarter Wave Lightning Arrestor
ANT-MD24-12	2.4 GHz, 12dBi Mini Directional Antenna
ANT-PAD24-16	2.4 GHz, 16dBi Panel Directional Antenna
ANT-PAD58-19	5.8 GHz, 19dBi Panel Directional Antenna
ANT-PD58-32	5.8 GHz, 32dBi Parabolic Dish Antenna
ANT-DB1-RAF-RPSMA	702-W Dual Band Antenna, RP-SMA (Replacement Part; Qty. = 1)
ANT2458Q5P2	702M12-W Dual Band Antenna, IP67 O-Ring, RP-TNC (Replacement Part; Qty. = 1)

## Mounting Kits



100-MDR-1	Metal DIN-Rail Option for 100 Series Switches in Short Enclosures.♦
100-MDR-2	Metal DIN-Rail Option for 100 Series Switches in Tall Enclosures.♦
300-PM	Panel Mount Kit for N-Tron's 100*, & 300 Series Products. Converts Switch from DIN-Rail to Panel Mount. (*102MC-FL only)
500-UTA89	Metal DIN-Rail Clip for N-Tron's 508TX, 508FX2, & 509FX Switches.
700-PM	Panel Mount Kit for N-Tron's 700 & 7000 Series Switches excluding 702-W, 702-M12-W, & 708M12.
702-W-PM	Panel Mount Kit for N-Tron's 702-W Radio
702M12-PK	Pole Mount Kit for N-Tron's 702M12-W Radio
900-PM	Panel Mount Kit for N-Tron's 300, 500* & 700 Series. Converts Switch from DIN-Rail to Panel Mount. (*Excluding 524TX, & 526FX2)
1000-PM	Panel Mount Kit for the 105TX-SL, 1000 & 7506 Series
7026TX-PMK	Panel Mount Kit for N-Tron's 7026 Series
9000-PM	Panel Mount Kit for N-Tron's 9000BP Chassis. Converts Switch from DIN-Rail to Panel Mount.
9000-UTA107	Metal DIN-Rail Clip for N-Tron's 9000BP Chassis. 1 clip include. 2 additional clips may be installed.
CPMA-1	Metal Panel Mount Option for the 709FX, 710FX2, 711FX3 and 7010TX products.♦
CPMA-2	Metal Panel Mount Option for the 712FX4 and 714FX6 products.♦
M12DRC-ISO	DIN-Rail Kit for N-Tron's M12 Products. Two Isolated Plastic DIN-Rail Clips and Mounting Clips Included.
M12DRC-MTL	DIN-Rail Kit for N-Tron's M12 Products. Two Metal DIN-Rail Clips and Mounting Clips Included.
URMK	19" Rackmount Kit for N-Tron's 100, 300, 500*, 700, 7000, & 9000 Series. Allows Switches to be Rackmounted. (*Standard on 524TX & 526FX2)

## SFP (Mini GBIC) Transceivers



NTSFP-TX	1000BaseT Copper SFP Pluggable Mini-GBIC Transceiver (RJ-45 Connectors)
NTSFP-SX	1000BaseSX Multimode Fiber SFP Pluggable Mini-GBIC Transceiver (LC Style Connector, 550m)
NTSFP-LX-10	1000BaseLX Singlemode Fiber SFP Pluggable Mini-GBIC Transceiver (LC Style Connector, 10km)
NTSFP-LX-40	1000BaseLX Singlemode Fiber SFP Pluggable Mini-GBIC Transceiver (LC Style Connector, 40km)
NTSFP-LX-80	1000BaseLX Singlemode Fiber SFP Pluggable Mini-GBIC Transceiver (LC Style Connector, 80km)

♦Factory installed option must be specified with switch order.



# EL Layer 2 & 3 Series Managed Industrial Ethernet Switches

**NEW**

The EL Layer 2 & 3 series of Managed Ethernet switches feature innovative enterprise-class networking in a rugged package. These switches offer advanced security to prevent unauthorized access, real-time message delivery to prioritize data, sophisticated multicast controls to reduce traffic and built-in redundancy to ensure quick failover. Powerful network management and plug-and-play functionality simplifies deployment. EL Layer 3 series features industry leading hardware base routing for advanced support of multiservice networks. EL Layer 2 Series switches feature a rugged substation design and protected circuitry support for the harshest of applications.

- Advanced security prevents unauthorized access
- Real-time message delivery prioritizes data
- Sophisticated multicast controls reduce traffic
- Built-in redundancy ensures quick failover
- Powerful network management and plug-and-play functionality simplify deployment
- Rugged substation design and protected circuitry support the harshest of applications
- Rated for heavy industrial applications
- DIN-Rail and rackmount models

Call N-Tron today for  
more information  
about this exciting  
new product line.  
**+1 (251) 342-2164**





20 Willow Springs Circle  
 York, PA 17406 USA  
 +1 (717) 767-6511 phone  
 +1 (717) 764-0839 fax  
 sales@redlion.net

[www.redlion.net](http://www.redlion.net)

3101 International Drive • Building 6  
 Mobile, AL 36606 • USA  
 +1 (251) 342-2164 phone  
 +1 (251) 342-6353 fax  
 info@n-tron.com

[www.n-tron.com](http://www.n-tron.com)

N-Tron, Corporation was acquired by Red Lion Controls in 2010 and continues to operate with the same high levels of product quality and service that we have been known for worldwide as the experts in industrial networking.



© 2012 N-TRON, Corporation. N-TRON, N-View, N-Ring and the N-TRON logo are trademarks of N-TRON Corporation. EtherNet/IP is a trademark of ControlNet International used under license by ODVA. CIP is a trademark of ODVA. Product names mentioned herein are for identification purposes only and may be trademarks and/or registered trademarks of their respective company. Specifications subject to change without notice. U.S. Patent 6,728,262 Printed in U.S.A. Ver 43.int.1